SRW®

PRODUCTS

2018 PRODUCT CATALOG

SRW PRODUCTS

Your Complete HARDSCAPE Solution.























Everything You Need to Protect and Enhance Your Hardscapes

Locations

Corporate Office


32005 126th Street
PO Box 70
Princeton, MN 55371
Toll Free: 800-752-9326
Phone: 763-389-2722
Fax: 763-389-2725
www.SRWproducts.com

Distribution Centers

NORTH/CENTRAL
32020 126th Street
Princeton, MN 55371
Phone: 800-752-9326

NORTHEAST
Rt. 55 Industrial Center
70 Sewell Street, Unit I
Glassboro, NJ 08028
Phone: 856-244-7001


SOUTHEAST
2441 Hwy 123 East
Toccoa, GA 30577
Phone: 762-204-1770

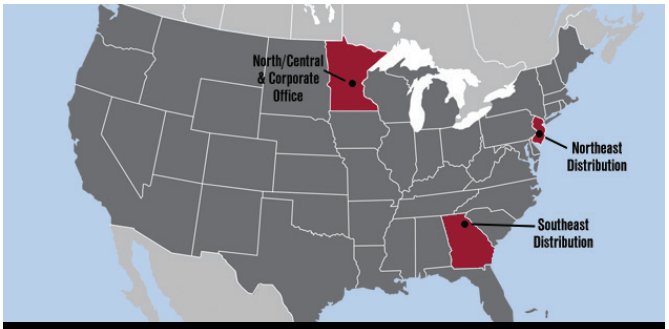

Office Locations

Our Extensive Dealer Network

SRW products are available from leading hardscape suppliers across the United States and Canada. Over 2,000 dealers turn to SRW Products for the consistent quality and performance they have come to trust.

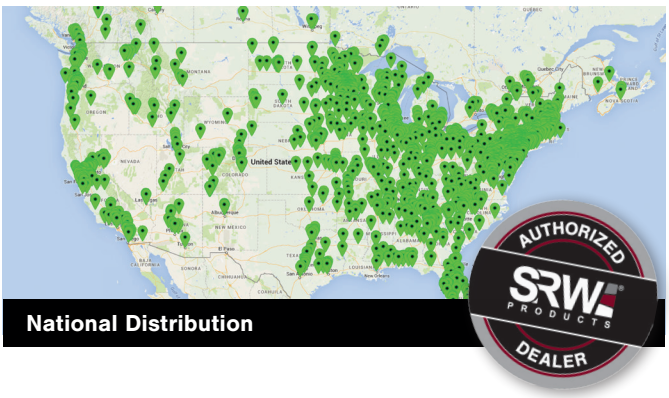

National Distribution

Please Note: *Any items packaged in cartons must be purchased in full carton quantities.*

ADHESIVE 6–7
Vertical Instant Lock 6
Superior Strength Solvent-Based, Rapid-Set Polyurethane 7

POLYMERIC SAND & EDGING 8–11
Pavermate Z3 8–10
SRW X-treme 10
Paver Rail, Edging, Spikes & Staples 11

CLEANERS 12–19
Clean Before Sealing 12–13
Specialty Clean™ 14–17
General Purpose Cleaners 18–19

SEALERS 20–39
Why Seal to Protect 20–23
Sealer Accessories 22
Specialty Seal™ 24–26
Premium Stone Seal™ 27–29
Paver Seal™ 30–33
Wetcast Seal™ 34–35
Concrete Seal™ 36–39

FABRIC 40–49
Fabric Resources & Accessories 41
General Landscape 42
Weed Control 43
Premium Landscape 44
Woven 45
Non-Woven 46–47
Construction Rolls 48–49

GEOGRID 50–51
Uni- & Bi-Directional Retaining Wall Geogrid 50
Road Base Reinforcement 51

WALL SYSTEMS & ENGINEERING 52–55
Sleeve-It™ 53
Earthworks™ 53
Hardscape Technical Services (HTS) 54–55

EROSION & IRRIGATION 56–60
Erosion Control 56–58
Irrigation 59
Sediment Control 60

DIAMOND BLADES 61–65
Cup Wheels 63
General Purpose 64
Hard Material 64
All Purpose 65
Abrasive Material 65

CONCRETE FIBERS 66–69
Concrete Fibers 66–68
Concrete Seal™ 69

ACCESSORIES 70–74
Path Stabilizer & Mulch Stabilizer 70
StringAlong, Slit Foam Rollers, SR Paver Grip 71
Professional Sprayers 72
Stretch Wrap, Caulking Guns, Fabric Seaming Adhesive 73
Spikes, Staples, Pins, Staple Setters, Pin Pounders 74

RESOURCES & REFERENCE 75–79
Retail Displays 75
Point-of-Purchase Materials 75
Spanish Resources 75
Reference & Application Charts 76–79

Welcome

SRW Products is a family owned company whose mission is to provide innovative, industry-leading products to distributors across North America. We focus on People, Products and Partnerships, by fostering relationships, and by providing a comprehensive product, sales and support experience. We pride ourselves on providing better service, better products, better support to ensure the best results. We measure success one satisfied customer at a time.



After all, we are SRW Products. No one does it better!

David Orton

David Orton, CEO

Territory Managers



Michael Anderson*
Cell: 856-952-2007 **Office:** 856-244-7004
Email: *michaelanderson@srwproducts.com*
Serving: Central & South NJ, PA, DE, WV, Puerto Rico



Josh Asplund
Cell: 978-696-7847 **Office:** 763-260-8754
Email: *joshasplund@srwproducts.com*
Serving: CT, MA, ME, NH, VT, RI



Elias Corona
Cell: 619-348-4999 **Office:** 763-260-8737
Email: *eliascorona@srwproducts.com*
Serving: UT, AZ, Southern CA, Eastern NV



Nick Fiorita
Cell: 973-722-9081 **Office:** 763-260-8732
Email: *nickfiorita@srwproducts.com*
Serving: NY, North NJ



Dave Hurston
Cell: 770-241-1066 **Office:** 763-260-8731
Email: *davehurston@srwproducts.com*
Serving: TN, NC, SC, GA, MS, AL, FL



Ken Johnson
Cell: 773-708-6296 **Office:** 763-260-8753
Email: *kenjohnson@srwproducts.com*
Serving: IL, MO, IN



Chris Jones
Cell: 614-397-8126 **Office:** 763-260-8743
Email: *chrisjones@srwproducts.com*
Serving: OH, MI, KY



Darren Kolke
Cell: 763-218-0269 **Office:** 763-260-8712
Email: *darrenkolke@srwproducts.com*
Serving: OK, AR, MN, WI, Upper MI



David Lowery
Cell: 541-357-2828 **Office:** 763-260-8736
Email: *davidlowery@srwproducts.com*
Serving: AK, WA, ID, OR, Northern CA, Western NV, Canada: BC



Jason Orton*
Cell: 763-350-3327 **Office:** 763-260-8715
Email: *jasonorton@srwproducts.com*
Serving: National Accounts, MN
Canada: ON, QC, NS, NB, PE



Mike Patronik
Cell: 410-739-6487 **Office:** 763-260-8738
Email: *mikepatronik@srwproducts.com*
Serving: MD & VA



Dale Perbix*
Cell: 763-498-2775 **Office:** 763-260-8714
Email: *daleperbix@srwproducts.com*
Serving: MT, ND, SD, MN, IA, NE, WY, CO, KS, NM, Canada: AB, MB, SK



James Vandenburg
Cell: 469-352-8422 **Office:** 763-260-8752
Email: *jamesvandenburg@srwproducts.com*
Serving: TX & LA



Tim Sanborn*
Cell: 763-203-2966 **Office:** 763-260-8713
Email: *timsanborn@srwproducts.com*

*Regional Sales Managers

Product Specialists



Joel Baker
Toll Free: 800-752-9326
Office: 763-260-8722
Email: *joelbaker@srwproducts.com*



Shayne Kutzler
Toll Free: 800-752-9326
Office: 763-260-8724
Email: *shaynekutzler@srwproducts.com*

NEW for 2018

PAVERMATE Z3
POLYMERIC SAND

ZERO HAZE

ZERO DUST

ZERO PROBLEMS


See pages 8–10

Path Stabilizer



See page 70

Tree Watering Bags and Rings


See page 59

Standard Caulking Gun



See page 73

Diamond Cup Wheels


See page 63



Vertical Instant Lock

No mortar. No bracing. No kidding.

This adhesive from SRW Products can save valuable time by instantly locking stone and other materials in place without sag or slip.

Benefits

- Instantly locks building materials in place
- Strong, permanent bond with many materials
- Low odor, ideal for indoor or outdoor use
- Great for outdoor kitchens, veneers & repairs
- Repositionable for 10 minutes
- Quick curing and non-corrosive
- V-notch nozzle—perfect application every time
- 12 month shelf life

Applications

- Natural Stone
- Manufactured Stone
- Indoor/Outdoor
- Brick, Block & Pavers
- Glass & Ceramic Tile
- Veneers
- Dry Stack
- Masonry
- Outdoor Kitchens
- Metal & Wood

COVERAGE: *Approximate Length of Bead*
9.5 oz
210 linear inches

SRW Vertical Instant Lock Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY
AVIL 10	9.5 oz	12/CTN	64 CTNS/PLT



SEE IT IN ACTION
Vertical Instant Lock Demo
http://bit.ly/InstantLockVid4

Vertical Instant Lock Adhesive requires a caulking gun with a **MINIMUM 14:1 THRUST RATIO**. See pg. 73 for SRW Premium Caulking Gun.



Superior Strength Solvent-Based

For over 25 years, SRW Adhesive has been time-tested and proven its performance in countless hardscape projects.

Benefits

- Superior strength and longevity
- Works on wet or frozen surfaces
- High-temperature compatible
- Extrudes down to 10°F
- Interior/exterior use
- 18 month shelf life

Applications

Works on most common landscaping & construction materials

- Retaining Walls
- Pavers/Block
- Firepits
- Concrete
- Metals/Wood
- Natural Stone

COVERAGE: *Approximate Length of Bead*		
Bead Size	10 oz	28 oz
1/4″	32 ft	89 ft
3/8″	14 ft	35 ft

SRW Superior Strength Solvent-Based Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY
A 10	10 oz	12/CTN	64 CTNS/PLT
A 28	28 oz	12/CTN	44 CTNS/PLT

SRW Superior Strength Solvent-Based Adhesive VOC

PART #	SIZE	AMT PER CTN	QUANTITY
AP 10	10 oz	12/CTN	64 CTNS/PLT
AP 28	28 oz	12/CTN	44 CTNS/PLT



DON'T FORGET
SRW Caulking Guns.
See page 73 for ordering.



Rapid-Set Polyurethane

This polyurethane adhesive is specially formulated for construction and landscape projects needing a fast set-up time. It can be used on almost any material, even non-porous substrates.

Benefits

- Fastest set up time on the market
- Suitable for dry or damp surfaces
- High-temperature compatible
- Interior/exterior applications & VOC compliant
- Premium, long-lasting strength
- 12 month shelf life

Applications

Works on most common landscaping & construction materials

- Retaining Walls
- Pavers/Concrete
- Pool Copings
- Foam/Vinyl/PVC
- Firepits
- Brick
- Metals/Wood
- Natural Stone

COVERAGE: *Approximate Length of Bead*		
Bead Size	10 oz	28 oz
1/4″	32 ft	89 ft
3/8″	14 ft	35 ft

SRW Rapid-Set Polyurethane Adhesive

PART #	SIZE	AMT PER CTN	QUANTITY
APU 10	10 oz	12/CTN	64 CTNS/PLT
APU 28	28 oz	12/CTN	44 CTNS/PLT



NEW SRW® PRODUCTS

PAVERMATE Z3

POLYMERIC SAND *for paver joints up to 2″*

ZERO HAZE

Portland-free formula cleanly sweeps to reduce any material left on the paver surface.

ZERO DUST

New formula with polymers binding to each other and the sand particles reduces fines creating anti-dusting results.

ZERO PROBLEMS

Fastest set up on the market helps in situations with unforeseen weather. Water resistant packaging allows users to confidently store product with minimal covered storage.



NEW

Pavermate Z3

For Paver Joints up to 2″


New formula provides faster, stronger and longer lasting results. Use Pavermate Z3 on a wide variety of applications.
Zero Haze – Zero Dust – Zero Problems

Benefits

- **Zero Haze:** Portland-free formula cleanly sweeps to reduce any material left on the paver surface
- **Zero Dust:** New formula with polymers binding to each other and the sand particles reduces fines creating anti-dusting results
- **Zero Problems:** Fastest set up on the market helps in situations with unforseen weather and water-resistant packaging for minimal covered storage

Applications

- Joints up to 2″
- Driveways & Walkways
- Concrete Pavers
- Patios & Pool Decks
- Concrete Overlays & Non-Overlays

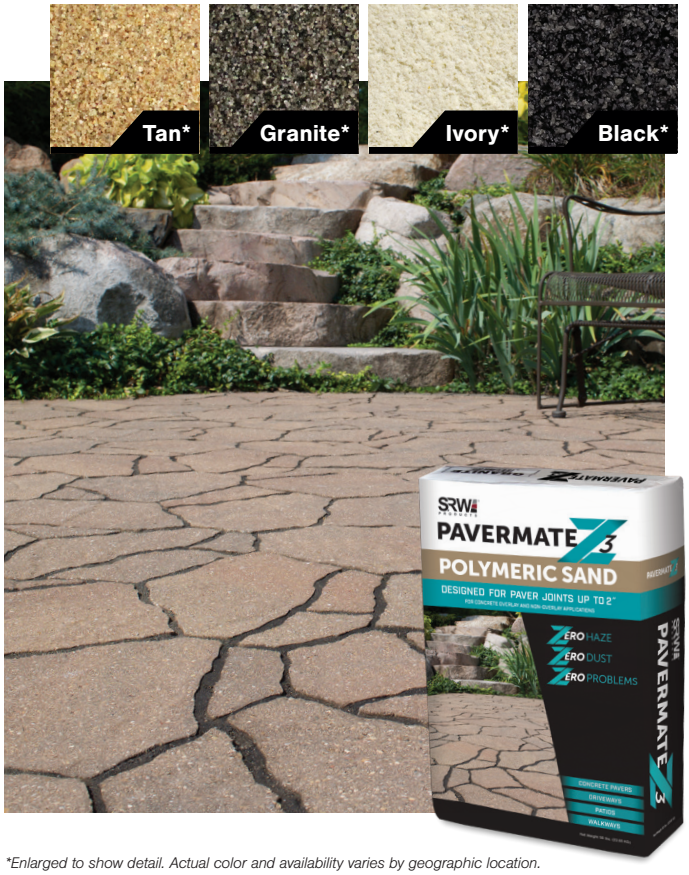

Enlarged to show detail. Actual color and availability varies by geographic location.

PAVERMATE Z3 Polymeric Sand • Joints up to 2″

PART #	COLOR	SIZE	QUANTITY
SSAN PAVZ3 TAN	TAN	50 lb BAG	49 BAGS/PLT
SSAN PAVZ3 GRA	GRANITE	50 lb BAG	49 BAGS/PLT
SSAN PAVZ3 BLK	BLACK	50 lb BAG	49 BAGS/PLT
SSAN PAVZ3 IVY	IVORY	50 lb BAG	49 BAGS/PLT

SRW Pavermate™

For Paver Joints up to 1½″

The **Advanced Polymer Technology**™ in SRW Pavermate creates superior durability for paver joints up to 1½″ without haze, cracking, washout, ants or weeds. The only worry-free polymeric sand on the market!



Benefits

- Exclusively engineered polymer blend for better activation and fast set up
- Superior bond and longevity
- Specifically manufactured to prevent hazing
- Fine gradation of sand fits in even the tightest joints
- Use in commercial and residential spaces

Applications

- Joints up to 1½″
- Standard or Tumbled Pavers
- Driveways
- Pool Decks
- Patios
- Walkways

SRW PAVERMATE Polymeric Sand • Joints up to 1½″

PART #	COLOR	SIZE	QUANTITY
SSAN PAVT50	TAN	50 lb BAG	49 BAGS/PLT
SSAN PAVG50	GRANITE	50 lb BAG	49 BAGS/PLT
SSAN PAVB50	BLACK	50 lb BAG	49 BAGS/PLT
SSAN PAVI50	IVORY	50 lb BAG	49 BAGS/PLT

SRW X-treme

For Natural Stone & Wetcast Joints up to 4″

SRW X-treme is unlike any other polymeric sand on the market. Its **Advanced Polymer Technology**™ is expertly engineered with the user in mind—ensuring flawless installation every time.



Benefits

- Exclusively engineered polymer blend for better activation and fast set- up
- Long-lasting, solid strength and durability
- Specifically manufactured to prevent hazing
- Won't crack, flake or peel
- Helps prevent ant infestation and weed growth

Applications

- Joints up to 4″
- Natural Stone
- Wetcast
- Patios
- Walkways

SRW X-TREME Polymeric Sand • Joints up to 4″

PART #	COLOR	SIZE	QUANTITY
SSAN XTRTAN	TAN	50 lb BAG	49 BAGS/PLT
SSAN XTRSLATE	SLATE	50 lb BAG	49 BAGS/PLT

**Enlarged to show detail. Actual color and availability varies by geographic location.*

Universal Paver Rail *Height 1 7/8″*

Universal Paver Rail creates a permanent and invisible barrier between hardscapes and other landscape materials.

Benefits

- Straight and curved applications
- For use with spikes, staples or stakes

Universal Paver Rail • Height 1 7/8″

PART #	SIZE	AMT PER CTN	QUANTITY
PRAIL UNIV	7′8″	12/BNDL	48 BNDLS/PLT

15′ Universal Paver Rail available by special order—pallet qty only.



Low Profile Paver Rail *Height 1 3/16″*

Low Profile Paver Rail can be installed against wetcast or natural stone to prevent shifting. Height is 1 3/16″

Benefits

- Low profile applications like natural stone
- For use with spikes, staples or stakes

Low Profile Paver Rail • Height 1 3/16″

PART #	SIZE	AMT PER CTN	QUANTITY
PRAIL UNIVLP	7′8″	12/BNDL	48 BNDLS/PLT



Flex Paver Rail *Height 1 7/8″*


Flex Paver Rail can be applied on both straight and curved applications. It is flexible for quick and easy installation.

Benefits

- Straight and curved applications
- For use with spikes or staples

Flex Paver Rail • Height 1 7/8″

PART #	SIZE	AMT PER CTN	QUANTITY
PRAIL EX	7′8″	12/BNDL	48 BNDLS/PLT

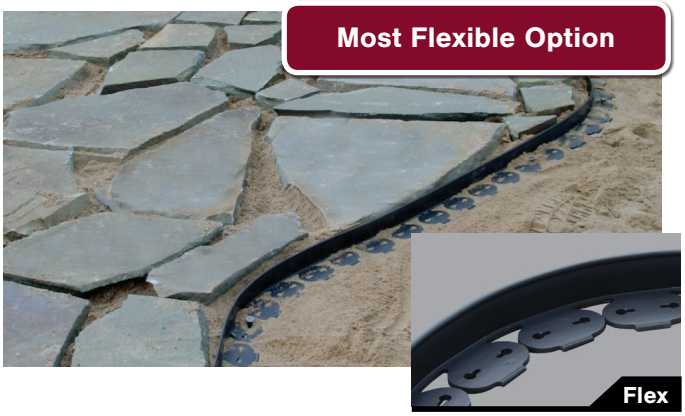

Paver Rail Spikes & Staples

SRW Paver Rail edging can be installed with spikes or staples. We carry an option of 10″ or 12″ spikes for your project needs. Our staples make for a simple install and save you money.

Spikes • Bulk Carton

	PART #	SIZE	AMT PER CTN	QUANTITY
A	FCMST 12-50#	12″ SMOOTH	50 lbs/CTN	48 CTNS/PLT
B	FCMST 10-50#	10″ SMOOTH	50 lbs/CTN	48 CTNS/PLT
C	FCMST 10-50#SS	10″ SPIRAL	50 lbs/CTN	48 CTNS/PLT
D	FCMST 10-50# GALV	10″ GALVANIZED	50 lbs/CTN	48 CTNS/PLT

Paver Rail Staples • 8 Gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
E	FCMST 10500P	10″	500/CTN	48 CTNS/PLT

**Counts vary by weight*





Clean Before Sealing for the Best Bond

Removing all surface stains is essential to getting the best-looking seal, but even if there is no evident staining on the surface, it's still important to use an SRW general purpose wash. Doing so will prepare the surface for optimal bond with the sealer. See page 18 for our general cleaners. Specialty cleaners are on pages 14-17. Scan the QR code or go to *bitly.com/LearnToSeal* for instructions.

INSTRUCTIONS
English & Spanish
bitly.com/LearnToSeal



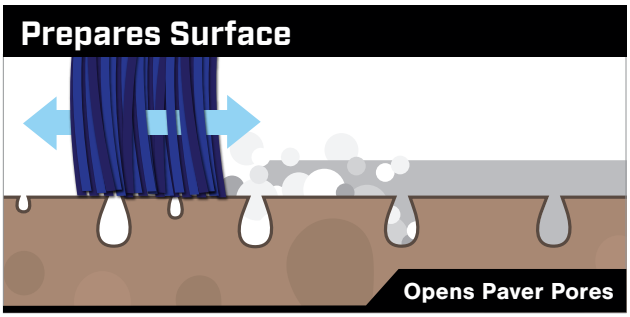


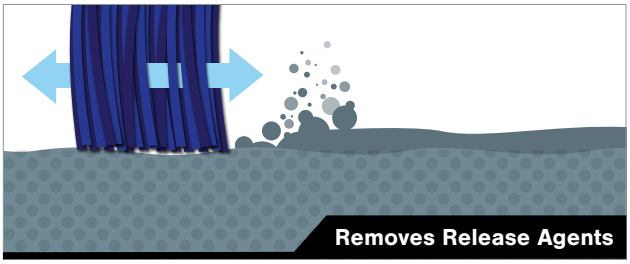


Instructions Made Easy

SRW cleaners feature this Easy 4-Step Process to save time and money. For your convenience, you can find the instructions on our website, in our tech sheets, on each product's packaging, and even on our YouTube channel. Scan the QR code or go to *bitly.com/SRWyoutube* to watch the how-to video!

WATCH NOW
How-To Videos
bitly.com/SRWyoutube

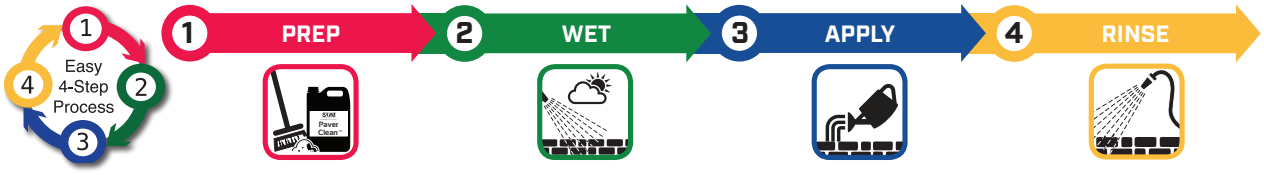

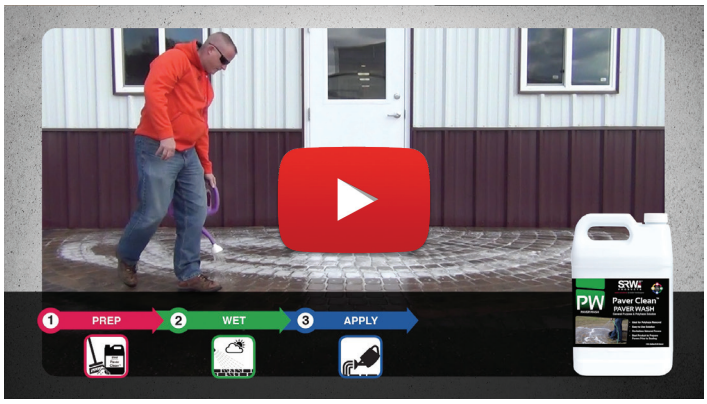



SRW Cleaners: Multiple Products, Multiple Solutions

Specialty Clean™



pg 14-17

Our line of Specialty Clean products have been formulated to solve a specific problem such as removing grease or eliminating rust. These provide the best results for your toughest challenges and can be used on a variety of surface materials.



General Purpose Cleaners



pg 18-19

The best seal starts with a clean surface, and each hardscape surface has distinctly different qualities. Whether it's removing dirt from natural stone or cast residue from wetcast, we've designed these cleaners to give you the best cleaning power for each surface type.



For PAVERS



For WETCAST



For NATURAL STONE



Choose the Best Cleaner for Your Project

SRW PRODUCTS Specialty Clean™ APPLICATION CHART	Natural Stone					Pavers		Wetcast	
	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Fieldstone/ Boulders	Concrete Pavers/Block	Clay Pavers	Wetcast	Manufactured Stone
EF EFFLORESCENCE						X	X		
MC MOLD, MOSS & MILDEW	X	X	X	X	X	X	X	X	X
CD CLEANER & DEGREASER	X	X		X	X	X	X	X	
RE RUST ELIMINATOR				X		X	X		
OC ORGANIC STAIN CLEANER	X	X	X	X	X	X	X	X	X
TR TAR & GUM REMOVER	X	X	X	X	X	X	X	X	
SS SEALER STRIPPER	X	X	X	X	X	X	X	X	
XY XYLENE SOLVENT	X	X	X		X	X		X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations.



EF Efflorescence



Benefits

- Dissolves mineral deposits (efflorescence)
- Restores original surface color
- Contains no muriatic acid or hydrochloric acid
- Ready to use—no diluting needed

Applications

- Pavers
- Concrete
- Brick/Clay

Not for use on sealed surfaces

Specialty Clean EF Efflorescence

PART #	SIZE	AMT PER CTN	QUANTITY
SSE CTN	1 gal	4/CTN	36 CTNS/PLT
SSE 5GAL	5 gal	1	36/PLT

MC Mold, Moss & Mildew Cleaner



Benefits

- Breaks down mold, moss, mildew, lichen & algae
- Non-acidic, no-bleach formula
- No pressure washing, scrubbing or rinsing!

Applications

- Most outdoor hard surfaces
- See application chart on page 14 for details

Specialty Clean MC Mold, Moss & Mildew

PART #	SIZE	AMT PER CTN
SSMC CTN QT2	1 qt	2/CTN
SSMC CTN QT6	1 qt	6/CTN
SSMC CTN GAL4	1 gal	4/CTN



DON'T FORGET
Get The Sprayer Too!

Our **SRW Heavy-Duty Sprayer** makes using MC Mold, Moss & Mildew Cleaner easy! It's high-output nozzle with mist, spray or stream capabilities ensures the fastest and most precise application. See page 72 for more information.

It's conveniently designed for use with most chemicals like disinfectants, fertilizers and weed killers/insecticides. The opaque, extra-thick resin bottle is ideal for solvents and chemicals, even those that are light sensitive. It's a must-have accessory that is sure to be used over and over!

Order part# SSSP 32OZ SPRAY BOTTLE CTN 6

WATCH THE VIDEO!
bitly.com/M3Cvideo

OC Organic Stain Cleaner



Benefits

- Breaks down organic stains from leaves, wood tannins, pine needles, acorns, fruit, wine, etc.
- Rinses clean with water

Applications

- Pavers
- Wetcast
- Concrete
- Bluestone
- Sandstone
- Clay/Brick
- Granite
- Limestone/Marble
- Manufactured Stone

Specialty Clean OC Organic Stain Cleaner

PART #	SIZE	AMT PER CTN
SSOC 2LB CTN 2	2 lbs	2/CTN
SSOC 2LB CTN 6	2 lbs	6/CTN

CD Cleaner & Degreaser



Benefits

- Removes grease, oil and dirt
- Rinses clean with water
- Fast-acting concentrated formula

Applications

- Pavers
- Clay/Brick
- Concrete
- Wetcast
- Limestone
- Granite
- Bluestone
- Sandstone

Not for use on sealed surfaces

Specialty Clean CD Cleaner & Degreaser

PART #	SIZE	AMT PER CTN
SSD CTN 2	1 qt	2/CTN
SSD CTN 6	1 qt	6/CTN

RE Rust Eliminator



Benefits

- Removes rust and hard water stains
- Rinses clean with water
- Heavy-duty concentrated formula

Applications

- Pavers/Concrete
- Clay/Brick
- Bluestone

Not for use on sealed surfaces

Specialty Clean RE Rust Eliminator

PART #	SIZE	AMT PER CTN
SSRE CTN 2	1 qt	2/CTN
SSRE CTN	1 qt	6/CTN

TR Tar, Gum & Rubber Remover



Benefits

- Removes tar, gum, rubber and paint
- Easy to use
- Rinses clean with water

Applications

- Pavers/Brick
- Concrete
- Wetcast
- Natural Stone

Not for use on plastic, plastic composite materials, rubber or fiberglass

Specialty Clean TR Tar & Gum Remover

PART #	SIZE	AMT PER CTN
SSTR 29OZ CTN 2	29 oz	2/CTN
SSTR 29OZ CTN 6	29 oz	6/CTN

XY Xylene Solvent



Benefits

- Fast-acting solvent

Applications

- Aids in clean-up of tools
- Removes unwanted overspray
- Thins and dissolves acrylic sealers
- Removes trapped moisture in most film-forming sealers

Not for use on plastic, plastic composite materials, rubber or fiberglass

Specialty Clean XY Xylene Solvent

PART #	SIZE	AMT PER CTN	QUANTITY
SSS XY CTN QT	1 qt	6/CTN	—
SSS XY CTN	1 gal	4/CTN	36 CTNS/PLT
SSS XY	5 gal	1	36/PLT

SS Sealer Stripper



Benefits

- Industrial strength
- Biodegradable

Applications

- Graffiti/Dry Fog Paints
- Tile/Carpet Adhesive
- Aids in removal of sealing and curing compounds

Not for use on plastic, plastic composite materials, rubber or fiberglass

Specialty Clean SS Sealer Stripper

PART #	SIZE	AMT PER CTN	QUANTITY
SSS STRIPPER CTN	1 gal	4/CTN	36 CTNS/PLT
SSS STRIPPER5	5 gal	1	36/PLT








MUST-USE Products for Sealer Preparation!

SRW PRODUCTS General Purpose Cleaners APPLICATION CHART	Surface Material							
	Concrete Retaining Wall	Concrete Pavers	Clay Pavers	Wetcast	Granite	Limestone	Marble/ Travertine	Bluestone/ Sandstone
PW PAVER WASH	X	X	X					
WW WETCAST WASH				X				
SW STONE WASH					X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

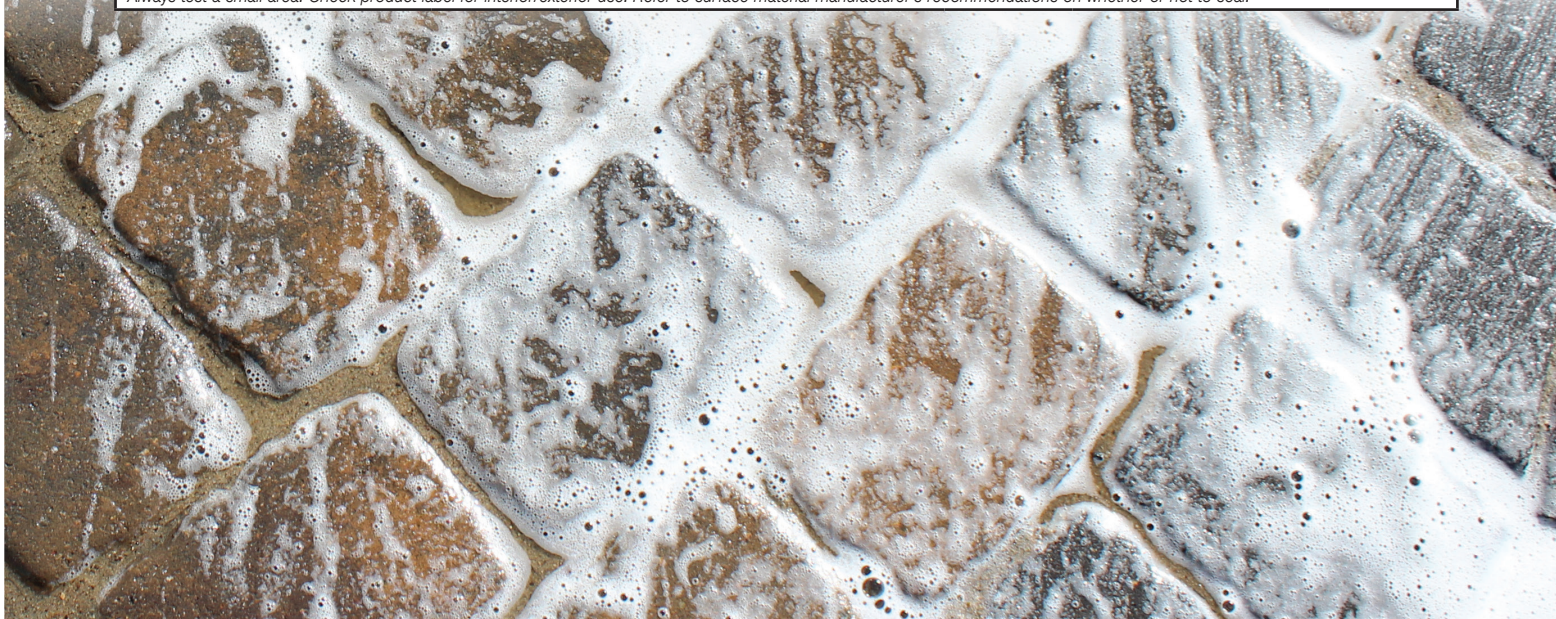

Paver Clean PW Paver Wash



Benefits

- Opens surface pores for optimal bond with sealer
- Restores original paver color
- Contains no muriatic acid or hydrochloric acid
- Removes polyhaze, efflorescence and ground-in dirt

Applications

- Concrete/Clay Pavers

Not for use on sealed surfaces. Use after spot treatments.

Paver Clean PW Paver Wash

PART #	SIZE	AMT PER CTN	QUANTITY
SSPW CTN	1 gal	4/CTN	36 CTNS/PLT
SSPW 5GAL	5 gal	1	36/PLT

Wetcast Clean WW Wetcast Wash



Benefits

- Removes release agents for optimal bond with sealer
- Removes ground-in dirt, light grease and oil
- Non-acidic formula
- Easy to use, concentrated formula

Applications

- Wetcast

Not for use on sealed surfaces. Use after spot treatments.

Wetcast Clean WW Wetcast Wash

PART #	SIZE	AMT PER CTN	QUANTITY
WETCAST WW CTN	1 gal	4/CTN	36 CTNS/PLT
WETCAST WW 5GAL	5 gal	1	36/PLT

Premium Stone Clean SW Stone Wash



Benefits

- Prepares natural stone surfaces prior to sealing
- Removes ground-in dirt, light grease and oil
- Non-acidic formula
- Easy to use, concentrated formula

Applications


- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone

Not for use on sealed surfaces. Use after spot treatments.

Premium Stone Clean SW Stone Wash

PART #	SIZE	AMT PER CTN	QUANTITY
STONE SW CTN	1 gal	4/CTN	36 CTNS/PLT
STONE SW 5GAL	5 gal	1	36/PLT

Seal to Protect Your Investment

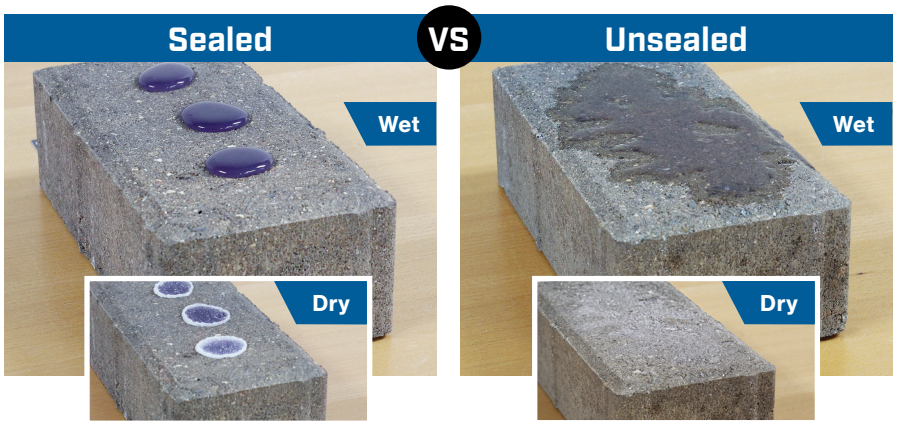

Prevent Damage and Lock Out:

- Salt/Acid Rain
- Pool Chemicals
- Color Fade
- Surface Erosion
- Deep Staining
- Freeze/Thaw

In these images you can see how unsealed pavers allow moisture and contaminants to seep into the surface. In contrast, water and salt pools on top of the sealed surface.





Choose the Look You Want

Penetrating = PS/PSX



Penetrating sealers create an invisible protective barrier. Available in Paver Seal (PS, PSX), Wetcast Seal (W-PSX) and Premium Stone Seal (S-PS, S-PSX).

Low Gloss = LG/LGX



Low Gloss sealers create a protective barrier while providing a color-enhancing surface sheen. Available in Paver Seal (LG, LGX) and multi-surface Specialty Seal (DG).

High Gloss = HG/HGX



High Gloss sealers provide protection with a wet look. Available in Paver Seal (HG, HGX), Wetcast Seal (W-HGX) and Premium Stone Seal (S-HGX).

Sealer Calculator for Quick Estimates

Estimating out how much sealer you'll need is easy! Just go to *bitly.com/SealerCalc* to use the SRW sealer calculator! Simply tell us how much area you will cover and we'll do the rest! Access the calculator on your computer, tablet or mobile device for convenience.


ESTIMATE NOW
Sealer Calculator
bitly.com/SealerCalc



Instructions Made Easy

SRW sealers feature this Easy 4-Step Process to save time and money. For your convenience, you can find the instructions on our website, in our tech sheets, on each product's packaging, and even on our YouTube channel. Scan the QR code or go to *bitly.com/SRWyoutube* to watch the how-to video!

WATCH HOW
SRW How-To Videos
bitly.com/SRWyoutube

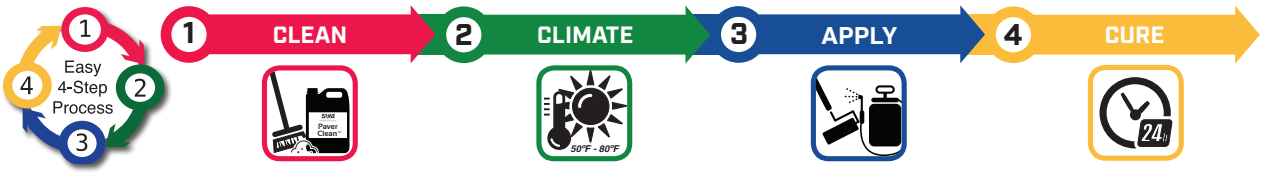






Sealer Accessories To Get The Job Done Right

Professional Grade Accessories pg 71-72

We've made it easy to identify which accessories to use. Simply look for these icons next to each sealer.

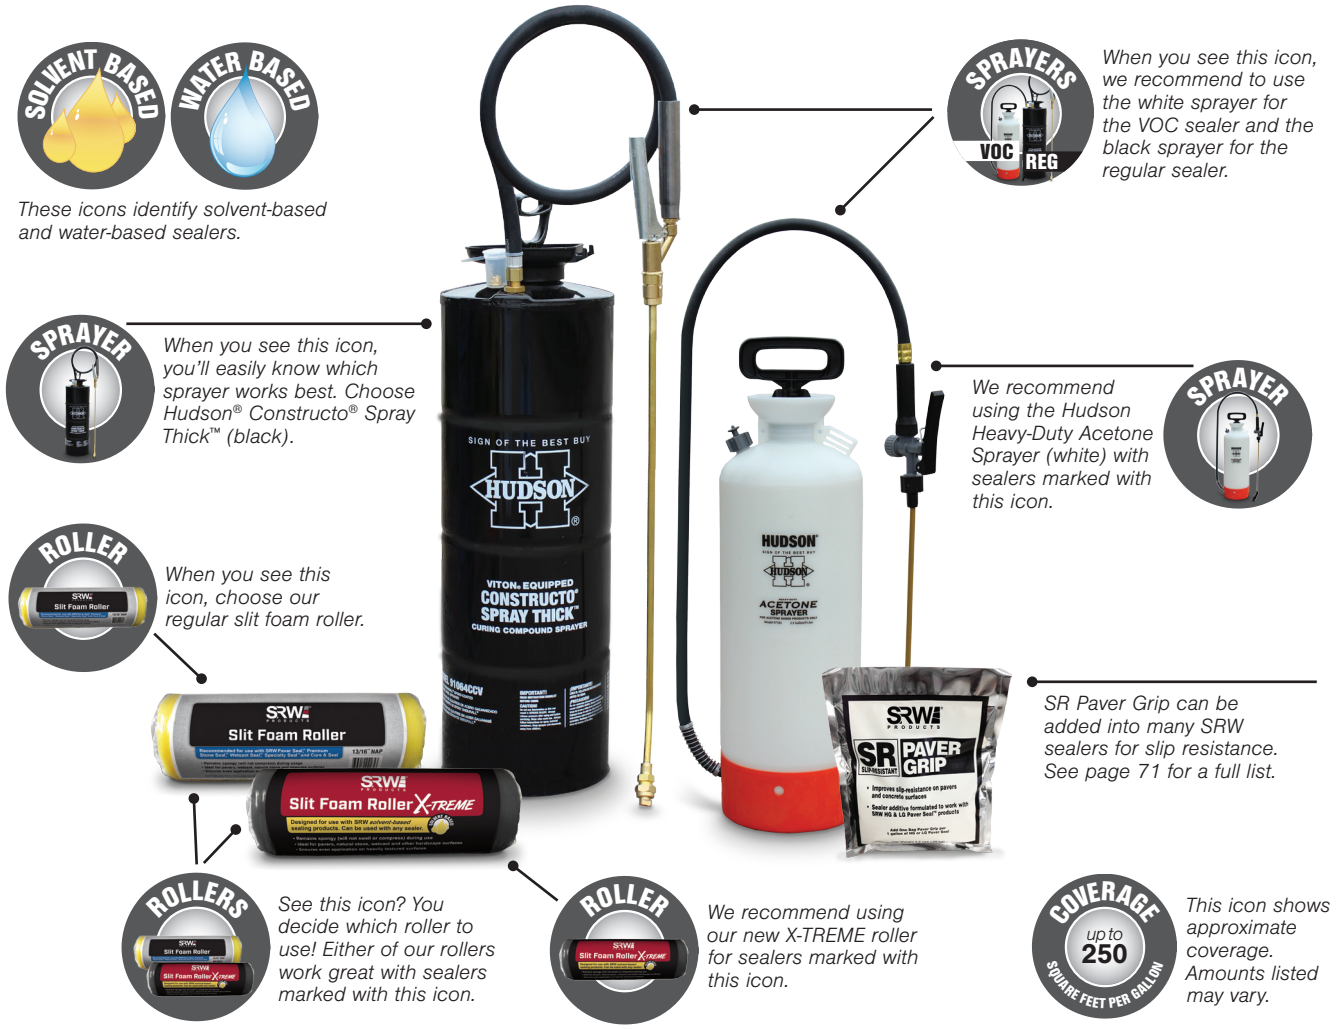

DON'T FORGET
Add these Accessories to your next Sealer order.



See page 72



See page 71



See page 71

SRW Sealers: The Best Formula for Every Surface

Specialty Seal™



pg 24–26

Our line of Specialty Seal products have been developed for a specific purpose and can be used on a variety of surface materials. They provide superior performance for a distinct goal, such as protection for counter tops or retaining walls.

Premium Stone Seal™



pg 27–29

Our Premium Stone Seal formulas offer the highest level of protection and were developed specifically for natural stone. Available in natural and wet-look finishes.

Paver Seal™



pg 30–33

Our original line of Paver Seal products has become the industry standard for superior paver protection. It is time-tested and proven to give the performance your customers demand.

Wetcast Seal™



pg 34–35

Our Wetcast Seal formulas are designed specifically for wetcast surfaces and will offer the best protection and enhancement. We offer two varieties to shield against life's most extreme conditions.

Concrete Seal™



pg 36–39

Our Concrete Seal products are in a category of their own to address applications from curing green concrete to protecting stamped concrete and exposed aggregate.




Specialized Sealers for Multiple Surfaces

SRW PRODUCTS Specialty Seal™ APPLICATION CHART	Surface Material									SRW Sealer Benefits					
	Retaining Wall Block	Concrete Pavers	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Manufactured Stone	Fieldstone/ Boulders	Wetcast	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Stain Resistance	Commercial Grade
DG DUAL GUARD	X	X	X	X	X		X	X	X		X	X	X		X
RWX RETAINING WALL X-TREME	X						X			X		X			X
CG COUNTER GUARD	X	X	X	X	X	X	X	X	X	X		X		X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

SPECS AND ACCESSORIES	COVERAGE SQ. FT.	WATER/SOLVENT	SPRAYER	SPRAYER	ROLLER	ROLLER	SLIP RESISTANCE
DG DUAL GUARD	250 sq.ft/gal	Solvent Based	VOC formula	REG formula		X	X
RWX RETAINING WALL X-TREME	175 sq.ft/gal	Water Based	X	X	X	X	
CG COUNTER GUARD	75 sq.ft/qt	Solvent Based	X	X		X	

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.

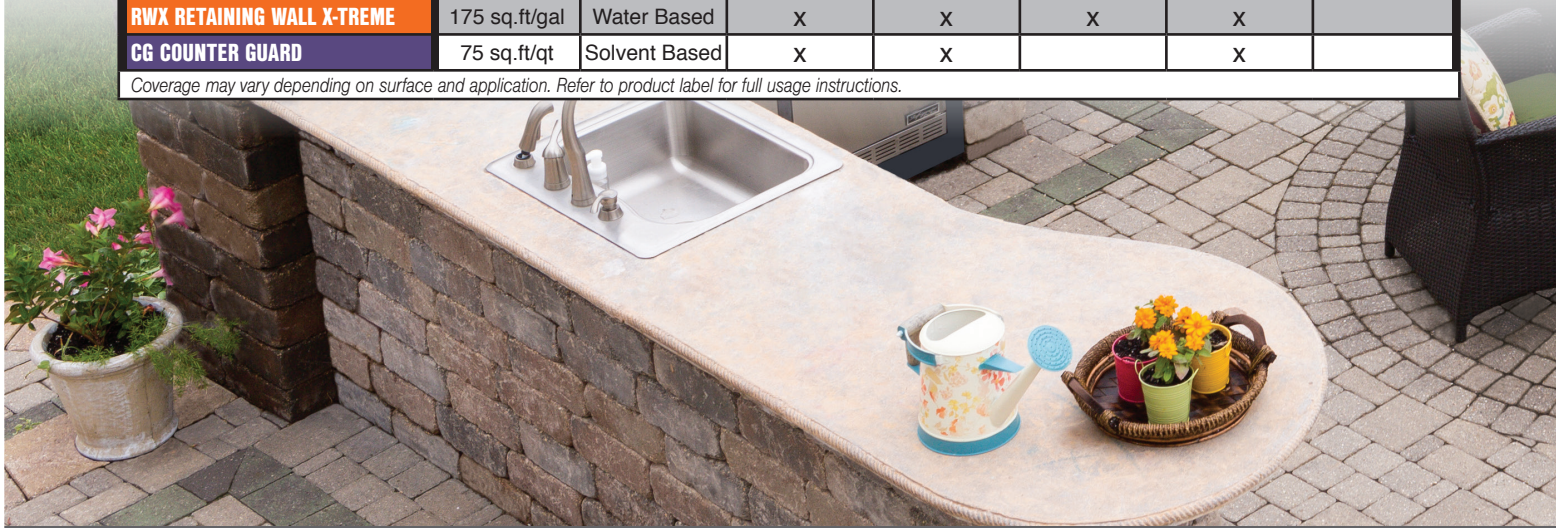

ADVANCED SEALER TECHNOLOGY: 2 Levels of Protection in One Easy Coat

Works on Many Surfaces!



DG Dual Guard



See page 24 for specific recommendations.

Recommended for high traffic or commercial areas, this unique sealer provides two types of protection plus color enhancement for many surfaces. It can be used on vertical or horizontal applications.

Benefits

- 2 levels of protection in 1 easy application
- Long-lasting penetrating protection
- Color enhancing, wet-look finish
- Acrylic/siloxane blend
- Commercial strength

Applications

- Concrete Pavers
- Most Natural Stone
- Wetcast
- Manufactured Stone

Not for use on structures under hydrostatic pressure

Specialty Seal DG Dual Guard

PART #	SIZE	AMT PER CTN	QUANTITY
SSDG CTN	1 gal	4/CTN	36 CTNS/PLT
SSDG 5GAL	5 gal	1	36/PLT

Specialty Seal DG Dual Guard VOC

PART #	SIZE	AMT PER CTN	QUANTITY
SSDG VOC CTN	1 gal	4/CTN	36 CTNS/PLT
SSDG VOC 5GAL	5 gal	1	36/PLT

RWX Retaining Wall X-treme





See page 24 for specific recommendations.

This penetrating sealer is specifically designed to protect retaining walls and other vertical applications against damaging effects of water intrusion, deicing chemicals, freeze/thaw and road spray.

Benefits

- Invisible/natural-look finish
- Ideal for commercial and residential applications
- Minimizes damage from salt, freeze/thaw and road spray
- Extends the life of the project
- DOT strength—meets specs in most states

Applications

- Concrete Retaining Walls

Not for use on structures under hydrostatic pressure

Specialty Seal RWX Retaining Wall X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC RWX CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC RWX 5GAL	5 gal	1	36/PLT

CG Counter Guard





See page 24 for specific recommendations.

CG Counter Guard creates an invisible barrier of defense for outdoor countertops, benches and work surfaces. It's perfect for any outdoor entertainment area to guard against spills.

Benefits

- Protects surfaces from staining by water, oils, grease, wine, coffee, foods and more
- Invisible/natural-look finish

Applications

- Concrete
- Clay/Brick
- Manufactured Stone
- Granite
- Bluestone
- Sandstone

Not for use on structures under hydrostatic pressure

Specialty Seal CG Counter Guard

PART #	SIZE	AMT PER CTN
SSCG CTN QT4	1 qt	4/CTN

WATCH THE VIDEO!
bitly.com/CGhowto



Don't Forget the Stone Wash!

See page 19

Choose the Best Formula for Your Natural Stone Project

THE BEST FORMULA FOR NATURAL STONE

SRW PRODUCTS Premium Stone Seal™ APPLICATION CHART	Surface Material					SRW Sealer Benefits				
	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Manufactured Stone	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Commercial Grade
S-PS PENETRATING	X	X	X	X	X	X		X		
S-PSX PENETRATING X-TREME	X	X	X	X	X	X		X		X
S-HGX HIGH GLOSS X-TREME	X	X	X		X		X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

SPECS AND ACCESSORIES	COVERAGE SQ. FT.	WATER/SOLVENT	SPRAYER	SPRAYER	ROLLER	SLIP RESISTANCE
S-PS PENETRATING	200 sq.ft/gal	Solvent Based	VOC formula	REG formula	X	
S-PSX PENETRATING X-TREME	200 sq.ft/gal	Solvent Based		X	X	
S-HGX HIGH GLOSS X-TREME	250 sq.ft/gal	Solvent Based	VOC formula	REG formula	X	X

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.



S-PS Penetrating



SOLVENT BASED · COVERAGE up to 200 SQUARE FEET PER GALLON · SPRAYERS VOC REG · ROLLER

See page 27 for specific recommendations.

This penetrating sealer for natural stone can be used on both vertical and horizontal applications. It preserves the natural look of the stone while protecting it from damaging elements.

Benefits

- Invisible/natural-look finish
- Minimizes salt and freeze/thaw damage
- Seals and protects

Applications

- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone

Not for use on structures under hydrostatic pressure

Premium Stone Seal S-PS Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PS CTN	1 gal	4/CTN	36 CTNS/PLT
STONE S-PS 5GAL	5 gal	1	36/PLT

Premium Stone Seal S-PS VOC Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PS VOC CTN	1 gal	4/CTN	36 CTNS/PLT
STONE S-PS VOC 5GAL	5 gal	1	36/PLT

DON'T FORGET
Stone Wash: the best seal starts with a clean surface. See page 19.

S-PSX Penetrating X-treme



with Stain Preventer

SOLVENT BASED · COVERAGE up to 200 SQUARE FEET PER GALLON · SPRAYER · ROLLER

See page 27 for specific recommendations.

This sealer is a great choice for high traffic areas that need commercial-grade protection. Premium Stone Seal S-PSX preserves the natural look of many different types of stone.

Benefits

- 'Stain Preventer' technology
- Invisible/natural-look finish
- Recommended for high traffic walkways and commercial applications
- Protects stones from staining by water, oil, food and more

Applications

- Granite/Quartz
- Marble/Travertine
- Limestone
- Bluestone/Sandstone


Not for use on structures under hydrostatic pressure

Premium Stone Seal S-PSX Penetrating X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-PSX CTN	1 gal	4/CTN	36 CTNS/PLT
STONE S-PSX 5GAL	5 gal	1	36/PLT

S-HGX High Gloss X-treme





See page 27 for specific recommendations.

Premium Stone Cure & Seal S-HGX provides commercial-grade protection and enhancement to many types of natural stone. When applied, this sealer provides a color enhancing wet look.

Benefits

- High-gloss, wet-look finish
- Recommended for commercial and residential applications
- Highly durable, long-lasting protection in extreme conditions
- Enhances and protects

Applications

- Limestone
- Granite/Quartz
- Marble/Travertine
- Manufactured Stone

Not for use on structures under hydrostatic pressure

Premium Stone Cure & Seal S-HGX High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-HGX CTN	1 gal	4/CTN	36 CTNS/PLT
STONE S-HGX 5GAL	5 gal	1	36/PLT

Premium Stone Cure & Seal S-HGX VOC High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
STONE S-HGX VOC CTN	1 gal	4/CTN	36 CTNS/PLT
STONE S-HGX VOC 5GAL	5 gal	1	36/PLT

DON'T FORGET

We Have the Products You Need for Natural Stone Projects



Polymeric Sand pg 8–10 | Accessories pg 70–74 | Diamond Blades pg 61–65



Don't Forget the Paver Wash!

See page 19

Choose the Best Formula for Your Paver Project

THE BEST FORMULA FOR PAVERS

SRW PRODUCTS Paver Seal™ APPLICATION CHART	Surface Material			SRW Sealer Benefits					
	Concrete Pavers	Clay Pavers	Concrete Permeable Pavers	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	Stabilizes Joint Sand	UV Resistance	Commercial Grade
PS PENETRATING	X	X	X	X		X			
PSX PENETRATING X-TREME	X	X	X	X		X			X
LG LOW GLOSS	X				X	X	X	X	
LGX LOW GLOSS X-TREME	X				X	X		X	X
HG HIGH GLOSS	X				X	X	X	X	
HGX HIGH GLOSS X-TREME	X				X	X		X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

SPECS AND ACCESSORIES	COVERAGE SQ. FT.	WATER/SOLVENT	SPRAYER	SPRAYER	ROLLER	ROLLER	SLIP RESISTANCE
PS PENETRATING	200 sq.ft/gal	Water Based	X	X	X	X	
PSX PENETRATING X-TREME	200 sq.ft/gal	Water Based	X	X	X	X	
LG LOW GLOSS	150 sq.ft/gal	Water Based	X	X	X	X	X
LGX LOW GLOSS X-TREME	250 sq.ft/gal	Solvent Based	VOC formula	REG formula		X	X
HG HIGH GLOSS	150 sq.ft/gal	Water Based		X	X	X	X
HGX HIGH GLOSS X-TREME	250 sq.ft/gal	Solvent Based	VOC formula	REG formula		X	X

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.

PS Penetrating



See page 30 for specific recommendations.

This penetrating paver sealer provides protection from damaging elements like deicing chemicals and freeze/thaw exposure while preserving the natural look of the paver.

Benefits

- Invisible/natural-look finish
- Minimizes salt and freeze/thaw damage
- Interior/exterior
- Makes paver maintenance easier

Applications

- Concrete/Clay Pavers
- Concrete Permeable Pavers

Not for use on structures under hydrostatic pressure

Paver Seal PS Penetrating

PART #	SIZE	AMT PER CTN	QUANTITY
SSPSPLUS CTN	1 gal	4/CTN	36 CTNS/PLT
SSPSPLUS 5 GAL	5 gal	1	36/PLT

PSX Penetrating X-treme



See page 30 for specific recommendations.

This penetrating paver sealer is a great choice for high traffic or commercial areas. It's easy to apply on both horizontal and vertical applications and retains the original paver appearance.

Benefits

- Invisible/natural-look finish
- Minimizes salt and freeze/thaw damage
- Ideal for high traffic areas
- Interior/exterior

Applications

- Concrete/Clay Pavers
- Concrete Permeable Pavers

Not for use on structures under hydrostatic pressure

Paver Seal PSX Penetrating X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC PSX CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC PSX 5 GAL	5 gal	1	36/PLT

DON'T FORGET
Sprayers, Slit Foam Rollers and Paver Grip. See pages 71 & 72.

ESTIMATE NOW
Sealer Calculator
bitly.com/SealerCalc

NEW LG Low Gloss *New Enhanced Formula!*





See page 30 for specific recommendations.

Paver Seal LG extends paver life by protecting against elements that stain and deteriorate paver appearance while providing a low-gloss, color-enhancing finish. *Look for the enhanced formula sticker on the can lid.*

Benefits

- Low-gloss finish, color enhancing
- Stabilizes joint sand from washout, weeds & ants
- Minimizes salt and freeze/thaw damage
- Provides UV protection
- Interior/exterior

Applications

- Concrete Pavers


Not for use on structures under hydrostatic pressure or permeable pavers

Paver Seal LG Low Gloss

PART #	SIZE	AMT PER CTN	QUANTITY
SSPS CTN	1 gal	4/CTN	36 CTNS/PLT
SSPS 5 GAL	5 gal	1	36/PLT

LGX Low Gloss X-treme





See page 30 for specific recommendations.

Recommended for high traffic or commercial areas, this high color enhancement cure & seal extends paver life by protecting against elements that stain and deteriorate paver appearance.

Benefits

- Low-gloss finish
- High color enhancement
- Minimizes salt and freeze/thaw damage
- Provides UV protection
- Ideal for high traffic areas

Applications

- Concrete Pavers

Not for use on structures under hydrostatic pressure or permeable pavers

Paver Cure & Seal LGX Low Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC LGX CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC LGX 5GAL	5 gal	1	36/PLT

Paver Cure & Seal LGX VOC Low Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC LGX VOC CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC LGX VOC 5GAL	5 gal	1	36/PLT

HG High Gloss



See page 30 for specific recommendations.

This paver sealer delivers the highest level of protection and enhancement to pavers and joint sand, leaving a wet-look, high-gloss finish. It's an excellent choice to protect your investment.

Benefits

- High-gloss, wet-look finish
- Minimizes salt and freeze/thaw damage
- Provides UV protection
- Stabilizes joint sand from washout, weeds & ants
- Color enhancing

Applications

- Concrete Pavers

Not for use on structures under hydrostatic pressure or permeable pavers

Paver Seal HG High Gloss

PART #	SIZE	AMT PER CTN	QUANTITY
SSPSPRO CTN	1 gal	4/CTN	36 CTNS/PLT
SSPSPRO 5GAL	5 gal	1	36/PLT

HGX High Gloss X-treme





See page 30 for specific recommendations.

Recommended for high traffic or commercial areas, this high gloss cure & seal delivers unmatched protection and enhancement.

Benefits

- High-gloss, wet-look finish
- Minimizes salt and freeze/thaw damage
- Provides UV protection
- Ideal for high traffic areas
- Color enhancing

Applications

- Concrete Pavers

Not for use on structures under hydrostatic pressure or permeable pavers

Paver Cure & Seal HGX High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC HGX CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC HGX 5GAL	5 gal	1	36/PLT

Paver Cure & Seal HGX VOC High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
SSPC HGX VOC CTN	1 gal	4/CTN	36 CTNS/PLT
SSPC HGX VOC 5GAL	5 gal	1	36/PLT





Don't Forget the Wetcast Wash!

See page 19

Choose the Best Formula for Your Wetcast Project


THE BEST FORMULA FOR WETCAST

SRW PRODUCTS Wetcast Seal™ APPLICATION CHART	Surface Material		SRW Sealer Benefits				
	Wetcast	Manufactured Stone	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Commercial Grade
W-PSX PENETRATING X-TREME	X	X	X		X		X
W-HGX HIGH GLOSS X-TREME	X	X		X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations for sealing.

SPECS AND ACCESSORIES	COVERAGE SQ. FT.	WATER/SOLVENT	SPRAYER	SPRAYER	ROLLER	ROLLER	SLIP RESISTANCE
W-PSX PENETRATING X-TREME	200 sq.ft/gal	Water Based	X	X	X	X	
W-HGX HIGH GLOSS X-TREME	250 sq.ft/gal	Solvent Based	VOC formula	REG formula		X	X

Coverage may vary depending on surface and application. Refer to product label for full usage instructions.

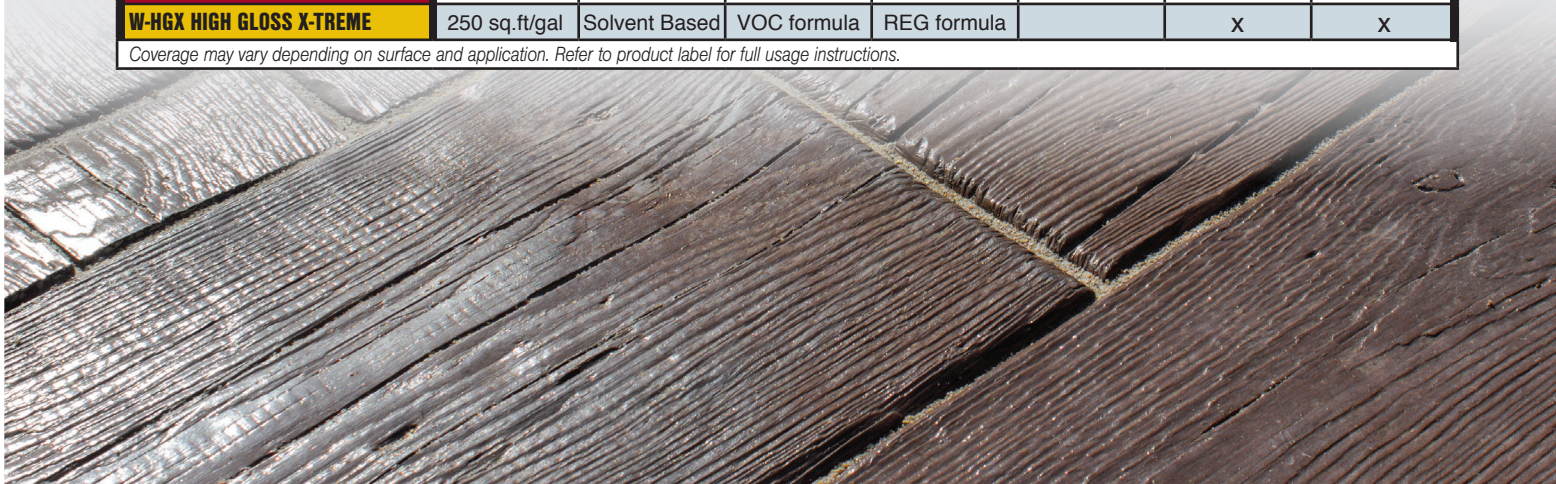

W-PSX Penetrating X-treme



See page 34 for specific recommendations.

This wetcast sealer delivers protection against damaging elements while preserving the natural look of the surface. Extends the life of wetcast surfaces in vertical and horizontal applications.

Benefits

- Invisible/natural-look finish
- Minimizes salt and freeze/thaw damage
- Ideal for high traffic areas
- Interior/exterior

Applications

- Wetcast
- Manufactured Stone

Not for use on structures under hydrostatic pressure

Wetcast Seal W-PSX Penetrating X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
WETCAST W-PSX CTN	1 gal	4/CTN	36 CTNS/PLT
WETCAST W-PSX 5GAL	5 gal	1	36/PLT

W-HGX High Gloss X-treme



See page 34 for specific recommendations.

This high-gloss wetcast sealer delivers unmatched protection and enhancement. It extends the life of the project by protecting wetcast surfaces from damaging elements. Can be used on vertical or horizontal applications.

Benefits

- High-gloss, wet-look finish
- Highly durable long-lasting protection
- Provides UV protection
- Ideal for high traffic areas
- Color enhancing

Applications

- Wetcast
- Manufactured Stone

Not for use on structures under hydrostatic pressure

Wetcast Cure & Seal W-HGX High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
WETCAST W-HGX CTN	1 gal	4/CTN	36 CTNS/PLT
WETCAST W-HGX 5GAL	5 gal	1	36/PLT

Wetcast Cure & Seal W-HGX VOC High Gloss X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
WETCAST W-HGX VOC CTN	1 gal	4/CTN	36 CTNS/PLT
WETCAST W-HGX VOC 5GAL	5 gal	1	36/PLT



THE BEST FORMULA FOR CONCRETE

Choose the Best Formula for Your Concrete Project

SRW PRODUCTS Concrete Seal™ APPLICATION CHART	Surface Material					SRW Sealer Benefits				
	Stamped Concrete	Exposed Aggregate	Stained Concrete	Green Concrete	Smooth/Broom Finished	Penetrating	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	Easy Maintenance	UV Resistance
1-STEP *Solvent Based*	x	x	x	x	x	x	x	x	x	x
X-TREME *Solvent Based*	x	x	x	x	x		x	x	x	x
X-TREME *Water Based*	x		x	x	x		x	x	x	x
SELECT *Solvent Based*	x	x	x	x	x		x	x	x	x
SELECT *Water Based*	x		x	x	x		x	x	x	x
GREEN *Solvent Based*				x	x		x	x	x	x
GREEN *Water Based*				x	x		x	x	x	x
TRUE SEAL *Solvent Based*	x	x			x	x		x	x	
TRUE SEAL *Water Based*	x	x			x	x		x	x	
FINISHING *Solvent Based*	x	x	x		x	x		x	x	

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

SPECS AND ACCESSORIES	COVERAGE SQ. FT.	WATER/SOLVENT	SPRAYER	SPRAYER	ROLLER	ROLLER	SLIP RESISTANCE
1-STEP	500 sq.ft/gal	Solvent Based	VOC formula	REG formula		x	x
X-TREME	500 sq.ft/gal	Both Available	VOC formula	REG formula	WB formula	x	x
SELECT	500 sq.ft/gal	Both Available	VOC formula	REG formula	WB formula	x	x
GREEN	500 sq.ft/gal	Both Available	VOC formula	REG formula	WB formula	x	x
TRUE SEAL	250 sq.ft/gal	Both Available	VOC formula	REG formula	WB formula	x	
FINISHING	150 sq.ft/gal	Solvent Based	VOC formula	REG formula		x	

Coverage may vary depending on surface and application. Refer to product label for full usage instructions. WB=Water Based formula where indicated.

1-Step



This 1-step sealer easily and quickly provides 2 levels of protection for concrete surfaces. The breathable seal weatherproofs and protects to extend the life of concrete surfaces.

Benefits

- High-gloss, wet-look finish
- 2-in-1: film forming and penetrating
- Provides long-term protection from salt, freeze/thaw, acid rain

2 in 1: High Gloss Finish & Penetrating Protection

Applications

- Exposed Aggregate
- Smooth/Broom Finished
- Stained Concrete
- Colored/Stamped Concrete

Not for use on uncured concrete or structures under hydrostatic pressure

See page 36 for specific recommendations.

Solvent Based • 1-Step

PART #	SIZE	AMT PER CTN	QUANTITY
CCS SB 1-STEP CTN	1 gal	4/CTN	36 CTNS/PLT
CCS SB 1-STEP 5GAL	5 gal	1	36/PLT

Solvent Based • 1-Step VOC

PART #	SIZE	AMT PER CTN	QUANTITY
CCS SB 1-STEP VOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS SB 1-STEP VOC 5GAL	5 gal	1	36/PLT

X-treme



Concrete Cure & Seal X-treme is our top performer. It contains the highest quality acrylics on the market today to protect and beautify concrete with a high-gloss, wet-look finish.

Benefits

- Best product for stamped concrete
- High-gloss, wet-look finish
- Highest level of premium acrylics

High Gloss Finish & Premium Quality!

Applications

- Exposed Aggregate
- Smooth/Broom Finished
- Stained Concrete
- Colored/Stamped Concrete

Not for use on structures under hydrostatic pressure. Use solvent based on exposed aggregate.

See page 36 for specific recommendations.

Solvent Based • X-treme

PART #	SIZE	AMT PER CTN	QUANTITY
CCS X CTN	1 gal	4/CTN	36 CTNS/PLT
CCS X 5	5 gal	1	36/PLT

Solvent Based • X-treme VOC

PART #	SIZE	AMT PER CTN	QUANTITY
CCS XVOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS XVOC 5	5 gal	1	36/PLT

Water Based • X-treme • *Indoor Use*

PART #	SIZE	AMT PER CTN	QUANTITY
CCS XWB CTN	1 gal	4/CTN	36 CTNS/PLT
CCS XWB 5	5 gal	1	36/PLT

Select



Concrete Cure & Seal Select uses a combination of premium acrylics to create a reliable barrier of protection. Its high-gloss, wet-look finish is sure to add beauty and value to any project.

Benefits

- High-gloss, wet-look finish
- Dustproofer for concrete surfaces
- Breathable barrier of protection

High-Gloss Finish & Best Selling for Concrete!

Applications

- Exposed Aggregate
- Smooth/Broom Finished
- Stained Concrete
- Colored/Stamped Concrete

Not for use on structures under hydrostatic pressure. Use solvent based on exposed aggregate.



See page 36 for specific recommendations.

Solvent Based • Select

PART #	SIZE	AMT PER CTN	QUANTITY
CCS SEL CTN	1 gal	4/CTN	36 CTNS/PLT
CCS SEL 5	5 gal	1	36/PLT

Solvent Based • Select VOC

PART #	SIZE	AMT PER CTN	QUANTITY
CCS SELVOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS SELVOC 5	5 gal	1	36/PLT

Water Based* • Select • *Indoor Use*

PART #	SIZE	AMT PER CTN	QUANTITY
CCS SELWB CTN	1 gal	4/CTN	36 CTNS/PLT
CCS SELWB 5	5 gal	1	36/PLT

**Ideally used for green concrete. Provides semi-gloss finish when used for sealing.*

Green



Concrete Cure & Seal Green is best suited for use on freshly poured concrete. This film-forming sealer prevents rapid moisture evaporation that leads to shrinkage cracking.

Benefits

- Cures freshly poured concrete
- Minimizes checking, crazing, cracking
- Reduces salt and freeze/thaw damage

Industrial Grade and Ideal for Green Concrete

Applications

- Green Concrete

Not for use on structures under hydrostatic pressure.



See page 36 for specific recommendations.

Solvent Based • Green

PART #	SIZE	AMT PER CTN	QUANTITY
CCS G CTN	1 gal	4/CTN	36 CTNS/PLT
CCS G 5	5 gal	1	36/PLT

Solvent Based • Green VOC

PART #	SIZE	AMT PER CTN	QUANTITY
CCS GVOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS GVOC 5	5 gal	1	36/PLT

Water Based • Green • *Indoor Use*

PART #	SIZE	AMT PER CTN	QUANTITY
CCS GWB CTN	1 gal	4/CTN	36 CTNS/PLT
CCS GWB 5	5 gal	1	36/PLT

True Seal





See page 36 for specific recommendations.

True Seal provides a penetrating protective barrier while leaving the surface true to its natural appearance. This high quality sealer extends the life of any concrete project.

Benefits

- Invisible/natural-look finish
- Reduces salt and freeze/thaw damage
- DOT strength

Invisible Barrier for Unsealed Concrete

Applications

- Exposed Aggregate
- Smooth/Broom Finished
- Stained Concrete
- Colored/Stamped Concrete

Not for use on structures under hydrostatic pressure

Solvent Based • True Seal

PART #	SIZE	AMT PER CTN	QUANTITY
CCS TSSB CTN	1 gal	4/CTN	36 CTNS/PLT
CCS TSSB 5	5 gal	1	36/PLT

Solvent Based • True Seal VOC


PART #	SIZE	AMT PER CTN	QUANTITY
CCS TSSBVOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS TSSBVOC 5	5 gal	1	36/PLT

Water Based • True Seal • *Indoor Use*

PART #	SIZE	AMT PER CTN	QUANTITY
CCS PS CTN	1 gal	4/CTN	36 CTNS/PLT
CCS PS 5	5 gal	1	36/PLT

Finishing





See page 36 for specific recommendations.

Designed for use on previously sealed concrete surfaces, this sealer cuts through the existing acrylic film and chemically bonds to the concrete for added protection.

Benefits

- Invisible, natural-look finish
- Apply over SRW Concrete Seal SB X-treme, SB Green or SB Select for added protection

Invisible Barrier for Sealed Concrete

Applications

- Previously Sealed Concrete Surfaces

Not for use on structures under hydrostatic pressure

Solvent Based • Finishing

PART #	SIZE	AMT PER CTN	QUANTITY
CCS FS CTN	1 gal	4/CTN	36 CTNS/PLT
CCS FS 5	5 gal	1	36/PLT


Solvent Based • Finishing VOC

PART #	SIZE	AMT PER CTN	QUANTITY
CCS FSVOC CTN	1 gal	4/CTN	36 CTNS/PLT
CCS FSVOC 5	5 gal	1	36/PLT

SRW Geotextiles: Quality You Can Trust

Spunbond

SRW Spunbond polypropylene geotextiles are commercial grade landscape fabrics with high puncture and tear resistance. Available in SB2 and SB3.

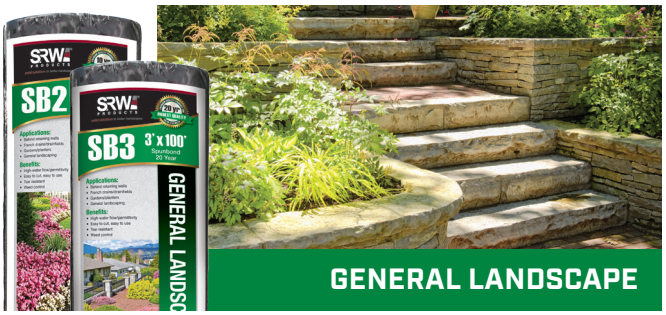

pg 42

Polyspun

SRW Polyspun polypropylene compressed and point-bonded fabric creates a strong and versatile weed barrier. Available in Residential, Contractor and Professional.



pg 43

Pro Plus & Ground Cover

SRW Pro Plus is both woven and non-woven polypropylene fabrics, needle-punched together with plant lines every 12 inches for easy plant alignment. Ground Cover is woven with plant lines.



pg 44

Woven

SRW Woven polypropylene geotextiles provide excellent puncture and tear resistant strength. SS5 is available in folded widths for your convenience. Permeable 350 and SS6 are also available.



pg 45

Non-Woven


Allow high water flow and provide dimensional stability with SRW Non-Woven fabrics. They will not rot or mildew. Available in LS3, NW4, NW4.5 and NW6.



pg 46

Heavy Duty Non-Woven

SRW Non-Woven needle-punched polypropylene fabrics are non-biodegradable geotextiles. Available in NW7, EC8, NW10, NW12 and NW16.

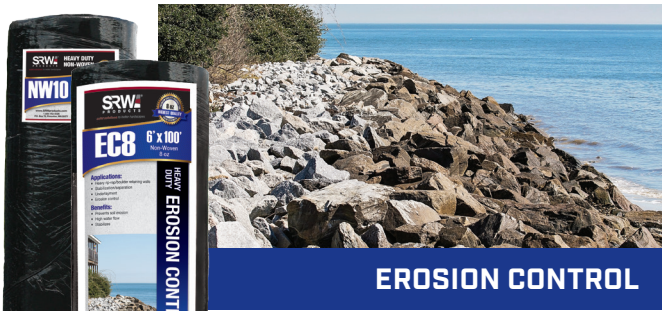

pg 47

We're Your Partners for Success




Fabric Accessories to Get the Job Done Right

We're your one-stop-shop. Get the products you need for all-around protection from the same trusted brand. SRW Products *is* that brand. For ordering information, see pages 70–74. Scan the QR code or go to *bitly.com/SRWaccess* to see all the available accessories on our website.

LEARN MORE



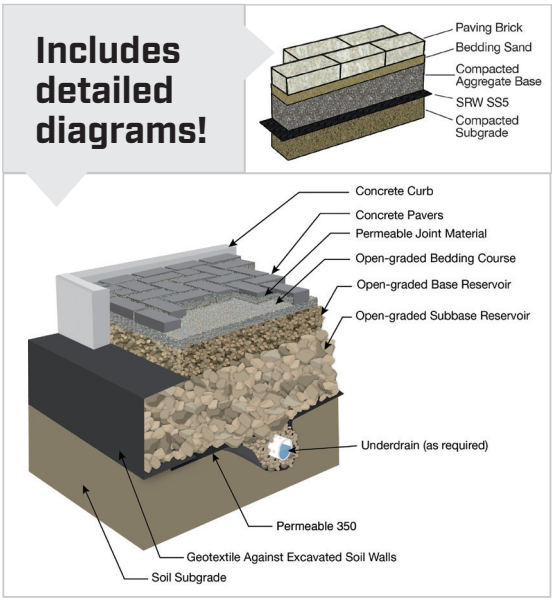

Instructions Made Easy

For your convenience, we offer a wealth of resources on our website, including installation guides for each of our fabric types. Scan the QR code or go to *bitly.com/SRWfabric* to get them now!

INSTRUCTIONS

General Landscape Fabric



PREMIUM QUALITY PRODUCT FOR 10-20yr BEST SELLING SOLID STRENGTH

Spunbond

SRW Spunbond polypropylene geotextiles are commercial grade landscape fabrics with high puncture and tear resistance. Spunbond geotextiles allow high water flow and excellent permittivity. Professional landscapers consider SRW Spunbond fabric to be a favorite due to its strength and versatility.

Benefits

- Excellent water flow/permittivity
- Easy to cut, easy to use
- Puncture and tear resistant
- Weed control

Applications

- Behind Retaining Walls
- French Drains/Drainfields
- Gardens/Planters
- General Landscaping



Don't forget the staples!
See page 74

SB2 • 10 Year • *300´ roll color coding green*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB2 03025	3´x25´	8.33	62/CTN
FSB2 03050	3´x50´	16.67	34/CTN
FSB2 03100	3´x100´	33.33	18/CTN
FSB2 03300	3´x300´	100.00	30/PLT
FSB2 04025	4´x25´	11.11	62/CTN
FSB2 04050	4´x50´	22.22	34/CTN
FSB2 04100	4´x100´	44.44	18/CTN
FSB2 04300	4´x300´	133.33	30/PLT
FSB2 06100	6´x100´	66.67	30/PLT
FSB2 06300	6´x300´	200.00	30/PLT
FSB2 12300	12´x300´	400.00	4/BNDL

SB3 • 20 Year • *300´ roll color coding yellow*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSB3 03025	3´x25´	8.33	45/CTN
FSB3 03050	3´x50´	16.67	24/CTN
FSB3 03100	3´x100´	33.33	12/CTN
FSB3 03300	3´x300´	100.00	30/PLT
FSB3 04025	4´x25´	11.11	45/CTN
FSB3 04050	4´x50´	22.22	24/CTN
FSB3 04100	4´x100´	44.44	12/CTN
FSB3 04300	4´x300´	133.33	30/PLT
FSB3 06100	6´x100´	66.67	30/PLT
FSB3 06300	6´x300´	200.00	30/PLT
FSB3 08300	8´x300´	266.67	4/BNDL
FSB3 12300	12´x300´	400.00	4/BNDL

LEARN MORE ONLINE
www.bitly.com/SRWfabric

Learn more about SRW general landscape fabric and get spec sheets and instructions.



Polyspun

SRW Polyspun polypropylene is a fine denier fiber laid in a continuous extrusion. This compressed and point-bonded fabric creates a strong and versatile weed barrier.

Benefits

- Creates a weed barrier
- Allows air, water and nutrients to pass through
- Promotes healthy plants by reducing weed growth

Applications

- Gardens and Landscapes
- Underlayment for Mulch and Decorative Rock
- Separation

QUICK TIP:
Add Mulch Stabilizer

Keep your mulch looking amazing all season long with this must-have landscaping product. It's easy to use, locks mulch in place and even enhances it's color. See more on page 70.
Order part# TAC MULCH CTN or TAC MULCH 5GAL.



Residential • 6 Year

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS1.5 03050	3´x50´	16.67	26/CTN
FPS1.5 03100	3´x100´	33.33	14/CTN
FPS1.5 03300	3´x300´	100.00	40/PLT

Contractor • 10 Year • *300´ roll color coding white*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS2 03050	3´x50´	16.67	23/CTN
FPS2 03100	3´x100´	33.33	12/CTN
FPS2 03300	3´x300´	100.00	20/PLT
FPS2 04050	4´x50´	22.22	23/CTN
FPS2 04100	4´x100´	44.44	12/CTN
FPS2 04300	4´x300´	133.33	20/PLT
FPS2 06100	6´x100´	66.67	30/PLT
FPS2 06300	6´x300´	200.00	20/PLT
FPS2 08300	8´x300´	266.67	4/BNDL

Professional • 15 Year • *300´ roll color coding tan*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPS3 03050	3´x50´	16.67	18/CTN
FPS3 03100	3´x100´	33.33	9/CTN
FPS3 03300	3´x300´	100.00	20/PLT
FPS3 04050	4´x50´	22.22	18/CTN
FPS3 04100	4´x100´	44.44	9/CTN
FPS3 04300	4´x300´	133.33	20/PLT
FPS3 06100	6´x100´	66.67	30/PLT
FPS3 06300	6´x300´	200.00	20/PLT
FPS3 08300	8´x300´	266.67	4/BNDL
FPS3 11300	11´x300´	366.67	4/BNDL

Premium Landscape Fabric



Pro Plus & Ground Cover

SRW Pro Plus is a double-sided or "capped" geotextile made of both woven and non-woven polypropylene fabrics, needle-punched together with plant lines every 12 inches for easy plant alignment.

Benefits

- Strength of a woven, permittivity of a non-woven
- Ground cover has highest UV protection
- Planting stripes make spacing quick and easy
- Retains moisture for plant health
- Weed control

Applications


- Soil/Landscape Stabilization
- Weed Barrier Under Landscape Beds, Gardens, Decks, Patios and Sidewalks



Path Stabilizer
See page 70

QUICK TIP:
Pro Plus Installation Tips

For best weed control, install this fabric with the fuzzy side facing the ground. For mulch stabilization install the fuzzy side up or for soil stabilization install fuzzy side down. Scan the QR code for a complete installation guide, or go to *bitly.com/PPIVinstruct*



Pro Plus IV • 20 Year • *Large roll color coding orange*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPP1V 03025	3´x25´	8.33	34/CTN
FPP1V 03050	3´x50´	16.67	15/CTN
FPP1V 03100	3´x100´	33.33	8/CTN
FPP1V 03250	3´x250´	83.33	20/PLT
FPP1V 04050	4´x50´	22.22	15/CTN
FPP1V 04100	4´x100´	44.44	8/CTN
FPP1V 04250	4´x250´	111.11	20/PLT
FPP1V 06100	6´x100´	66.67	30/PLT
FPP1V 06250	6´x250´	166.66	20/PLT
FPP1V 12250	12´x250´	333.33	4/BNDL

Pro Plus V • 25 Year • *Large roll color coding blue*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPPV 03250	3´x250´	83.33	20/PLT
FPPV 04250	4´x250´	111.11	20/PLT
FPPV 05250	5´x250´	138.89	20/PLT
FPPV 06250	6´x250´	166.66	20/PLT
FPPV 08250	8´x250´	222.22	4/BNDL
FPPV 12250	12´x250´	333.33	4/BNDL

GC3 • Ground Cover • *Colored Planting Stripes*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FGC3 03050	3´x50´	16.67	30/CTN
FGC3 03100	3´x100´	33.33	15/CTN
FGC3 03300	3´x300´	100.00	30/PLT
FGC3 04300	4´x300´	133.33	30/PLT
FGC3 06300	6´x300´	200.00	30/PLT
FGC3 10300	10´x300´	333.33	3/BNDL
FGC3 12300	12´x300´	400.00	3/BNDL
FGC3 15300	15´x300´	500.00	3/BNDL



Woven

SRW Woven polypropylene geotextiles provide excellent puncture and tear resistant strength. SS5 is available in folded widths for your convenience.

Benefits


- Improves long-term performance of projects
- Excellent puncture and tear resistance
- Reduces amount of base materials
- High strength and water flow
- SS5 meets DOT specs

Applications

- Stabilize Standard and Permeable Paver Projects
- Base Reinforcement for Roads, Driveways and Sidewalks
- Structural Support for Retaining Wall Base

QUICK TIP:
Get Our Installation Guides!
bitly.com/SS5instruct

Includes detailed diagrams!

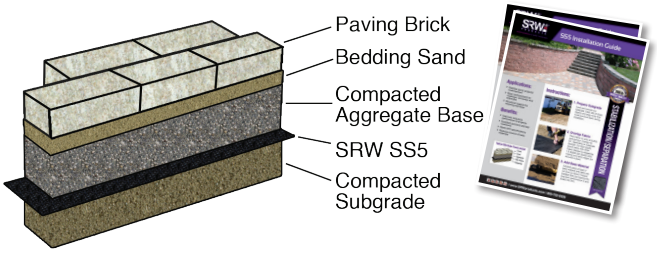

Permeable 350 • 350 lb • Monofilament Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FPE350 06100	6´x100´	66.67	30/PLT
FPE350 06300	6´x300´	200.00	20/PLT
FPE350 12300	12´x300´	400.00	3/BNDL

SS5 • 200 lb • Woven Slit Film • Folded

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 125016	12.5´x16´	22.22	14/CTN
FSS5 0125027	12.5´x27´	37.50	8/CTN
FSS5 0125054	12.5´x54´	75.00	30/PLT
FSS5 0125108	12.5´x108´	150.00	20/PLT
FSS5 1750515	17.5´x51.5´	100.00	20/PLT
FSS5 175103	17.5´x103´	200.00	16/PLT

SS5 • 200 lb • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FSS5 04050	4´x50´	22.22	20/CTN
FSS5 04100	4´x100´	44.44	11/CTN
FSS5 06050	6´x50´	33.33	1
FSS5 06100	6´x100´	66.67	20/BNDL–80/PLT

SS5 • 200 lb. • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS5 125432	12.5´x432´	600.00	3/BNDL
FCSS5 15360	15´x360´	600.00	3/BNDL
FCSS5 175309	17.5´x309´	600.00	3/BNDL

See SS6 on pg 49

QUICK TIP:
Save Money and Gain Performance

SS5 and SS6 can save as much as 30% in base material and associated costs while improving long-term performance by 50–70%. Learn more at *bitly.com/SS5-SS6*



Drainage & Filtration Non-Woven

Allow high water flow and provide dimensional stability with SRW Non-Woven fabrics. They will not rot or mildew.

Benefits

- Allows high water flow
- Soil separation for added stability
- High strength/dimensionally stable
- Promotes healthy vegetation
- Will not rot or mildew

Applications

- Drainage Protection
- Erosion Control
- Filtration
- General Landscape
- Stabilization/Separation



Don't forget the staples!
See page 74

QUICK TIP:
Display SRW Fabric

Need somewhere to showcase your SRW fabric? We've got you covered!

Order this black, metal, multi-armed display that measures: 72″h x 28¼″w x 27″d.

See page 75 for ordering information.



LS3 • General Landscape and Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FLS3 03025	3´x25´	8.33	26/CTN
FLS3 03050	3´x50´	16.67	15/CTN
FLS3 03100	3´x100´	33.33	30/PLT
FLS3 03300	3´x300´	100.00	12/PLT
FLS3 04050	4´x50´	22.22	15/CTN
FLS3 04100	4´x100´	44.44	30/PLT
FLS3 04300	4´x300´	133.33	12/PLT
FLS3 06100	6´x100´	66.67	30/PLT
FLS3 06300	6´x300´	200.00	12/PLT
FLS3 09300	9´x300´	300.00	3/BNDL
FLS3 12300	12´x300´	400.00	3/BNDL

NW4 • Drainage and Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4 03100	3´x100´	33.33	30/PLT
FNW4 03300	3´x300´	100.00	12/PLT
FNW4 04100	4´x100´	44.44	30/PLT
FNW4 04300	4´x300´	133.33	12/PLT
FNW4 06100	6´x100´	66.67	25/PLT
FNW4 06300	6´x300´	200.00	12/PLT
FCNW4 125360	12.5´x360´	500.00	3/BNDL
FCNW4 15360	15´x360´	600.00	3/BNDL

NW4.5 • Drainage and Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW4.5 03100	3´x100´	33.33	30/PLT
FNW4.5 03300	3´x300´	100.00	12/PLT
FNW4.5 04050	4´x50´	22.22	9/CTN
FNW4.5 04100	4´x100´	44.44	30/PLT
FNW4.5 04300	4´x300´	133.33	12/PLT
FNW4.5 06100	6´x100´	66.67	25/PLT
FNW4.5 06300	6´x300´	200.00	12/PLT
FCNW4.5 125360	12.5´x360´	500.00	3/BNDL
FCNW4.5 15360	15´x360´	600.00	3/BNDL

NW6 • Drainage and Filtration Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FNW6 06300	6´x300´	200.00	9/PLT
FCNW6 10100	10´x100´	111.11	6/BNDL
FCNW6 10300	10´x300´	333.33	3/BNDL
FCNW6 125360	12.5´x360´	500.00	3/BNDL
FCNW6 15300	15´x300´	500.00	3/BNDL



Heavy Duty Erosion Control Non-Woven

SRW Non-Woven needle-punched polypropylene fabrics are non-biodegradable geotextiles produced by joining together 100% polypropylene staple fibers in a random network to form high-strength, dimensionally-stable fabrics.

Benefits

- Allows high water flow
- Soil separation for added stability
- High strength/dimensionally stable
- Prevents soil erosion
- Rot & mildew resistant

Applications

- Heavy Rip-Rap/Boulder Retaining Walls
- Stabilization/Separation
- Underlayment
- Erosion Control

NW7 • Heavy Duty Erosion Control Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW7 15300	15´x300´	500.00	3/BNDL

EC8 • Heavy Duty Erosion Control Fabric

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FEC8 06100	6´x100´	66.67	20/PLT
FEC8 06300	6´x300´	200.00	9/PLT
FCEC8 125360	12.5´x360´	500.00	3/BNDL
FCEC8 15300	15´x300´	500.00	3/BNDL

NW10 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 125360	12.5´x360´	500.00	3/BNDL
FCNW10 15300	15´x300´	500.00	3/BNDL

NW12 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 125360	12.5´x360´	500.00	1
FCNW12 15300	15´x300´	500.00	1

NW16 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 125360	12.5´x360´	500.00	1
FCNW16 15150	15´x150´	250.00	1
FCNW16 15300	15´x300´	500.00	1

GEOTEXTILE SPECIFICATIONS			NON-WOVEN FABRICS				WOVEN FABRICS	
PROPERTIES	TEST	UNITS	NW4	NW4.5	NW6	EC8	SS5	SS6
Weight *(typical)*	D5261	oz/sq yd	4	4.5	6	8	4	6
Grab Tensile Strength	D4632	lbs	100	120	160	205	200	315
Grab Elongation	D4632	%	50	50	50	50	15	15
Trap-Tear Strength	D4533	lbs	45	50	60	80	75	120
CBR Puncture	D6241	lbs	270	310	410	525	700	900
Water Flow Rate	D4491	gpm/ft^2	140	120	110	90	5	4
Permittivity	D4491	1/sec	2	1.8	1.6	1.4	.05	.05
UV Resistance *(500 hr)*	D4355	%	70	70	70	70	70	70
Apparent Opening Size	D4751	US Sieve	70	70	70	80	50	40

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

Large Rolls Non-Woven



Standard Stocking Non-Woven Construction Rolls

The following large roll sizes are in stock and ready to ship.





NW4 • Drainage and Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4 125360	12.5´x360´	500.00	3/BNDL
FCNW4 15360	15´x360´	600.00	3/BNDL

NW4.5 • Drainage and Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW4.5 125360	12.5´x360´	500.00	3/BNDL
FCNW4.5 15360	15´x360´	600.00	3/BNDL

NW6 • Drainage and Filtration Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW6 125360	12.5´x360´	500.00	3/BNDL
FCNW6 15300	15´x300´	500.00	3/BNDL

NW7 • Heavy Duty Erosion Control Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW7 15300	15´x300´	500.00	3/BNDL

EC8 • Heavy Duty Erosion Control Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCEC8 125360	12.5´x360´	500.00	3/BNDL
FCEC8 15300	15´x300´	500.00	3/BNDL

Direct Ship Non-Woven Construction Rolls

The following large roll sizes are not in stock and will direct ship.



NW10 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW10 125360	12.5´x360´	500.00	3/BNDL
FCNW10 15300	15´x300´	500.00	3/BNDL

NW12 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW12 125360	12.5´x360´	500.00	1
FCNW12 15300	15´x300´	500.00	1

NW16 • Heavy Duty Non-Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCNW16 125360	12.5´x360´	500.00	1
FCNW16 15150	15´x150´	250.00	1
FCNW16 15300	15´x300´	500.00	1



Standard Stocking Woven Construction Rolls

The following large roll sizes are in stock and ready to ship.



SS5 • 200 lb. • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS5 125432	12.5´x432´	600.00	3/BNDL
FCSS5 15360	15´x360´	600.00	3/BNDL
FCSS5 175309	17.5´x309´	600.00	3/BNDL

SS6 • 315 lb. • Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS6 125360	12.5´x360´	500.00	3/BNDL
FCSS6 175258	17.5´x258´	500.00	3/BNDL

Direct Ship Woven Construction Rolls

The following large roll sizes are not in stock and will direct ship.





See page 73 for fabric seaming adhesive.

SS6 • 315 lb. Woven Slit Film

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCSS6 15300	15´x300´	500.00	3/BNDL

SRW 270HP • High Strength Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC270HP 15300	15´x300´	500.00	3/BNDL

SRW 370HP • High Strength Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC370HP 15300	15´x300´	500.00	3/BNDL

SRW 570HP • High Strength Woven

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC570HP 15300	15´x300´	500.00	3/BNDL

SRW MM402 • Monofilament

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC402MM 12300	12´x300´	400.00	3/BNDL

SRW MM403 • Monofilament

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC403MM 15300	15´x300´	500.00	3/BNDL

SRW MM700 • Monofilament

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FC700MM 12300	12´x300´	400.00	3/BNDL



Retaining Wall Geogrid

SRW retaining wall geogrid adds strength and longevity to retaining walls and steep slopes.

Benefits

- Adds strength and longevity to your wall
- Provides excellent stress transfer
- Helps prevent premature wall failure
- Easy to handle roll sizes

Applications

- Retaining Walls & Steep Slopes

Universal • Bi-Directional • LTDS 688 • Walls up to 6´

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW U350	3´x50´	16.67	10/CTN
GSRW U445	4´x45´	20.00	12/CTN
GSRW U450	4´x50´	22.22	10/CTN
GSRW U650	6´x50´	33.33	40/PLT

3 Series • Bi-Directional • LTDS 1161 • Walls up to 10´

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 3450	4´x50´	22.22	9/CTN
GSRW 365	6´x50´	33.33	40/PLT
GSRW 3615	6´x150´	100.00	30/PLT
GSRW 31215	12´x150´	200.00	3/BNDL

5 Series • Uni-Directional • LTDS 2064

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 565	6´x50´	33.33	35/PLT
GSRW 5615	6´x150´	100.00	30/PLT
GSRW 51215	12´x150´	200.00	3/BNDL

7 Series • Uni-Directional • LTDS 2867

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 7615	6´x150´	100.00	20/PLT
GSRW 71215	12´x150´	200.00	3/BNDL

8 Series • Uni-Directional • LTDS 3555 • *Direct Ship*


PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 81215	12´x150´	200.00	3/BNDL

9 Series • Uni-Directional • LTDS 4329 • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 91215	12´x150´	200.00	3/BNDL

10 Series • Uni-Directional • LTDS 5160 • *Direct Ship*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW 101215	12´x150´	200.00	3/BNDL

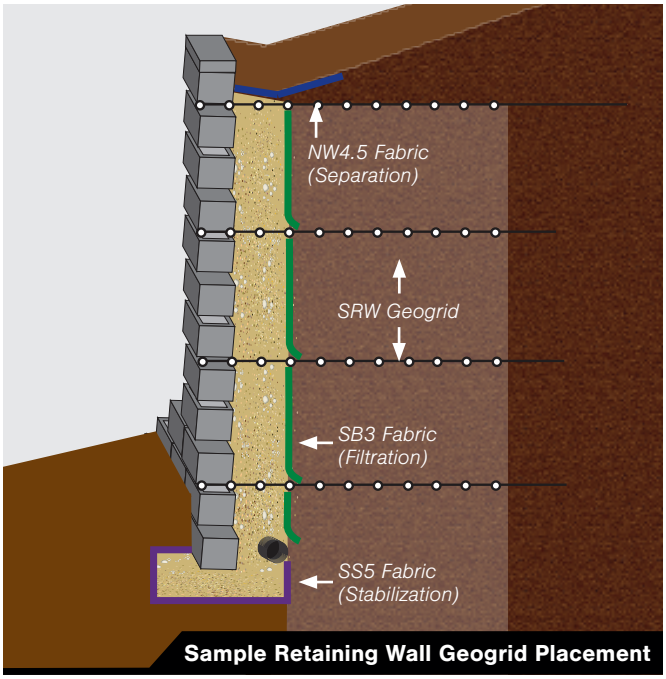

Sample Retaining Wall Geogrid Placement


QUICK TIP:
Installing Different Geogrid Types

Bi-Directional *(Universal & 3 Series)*

Can be rolled out either *perpendicular or parallel* to the wall.

Uni-Directional *(5–10 Series)*

Must be rolled out *perpendicular* to the wall.

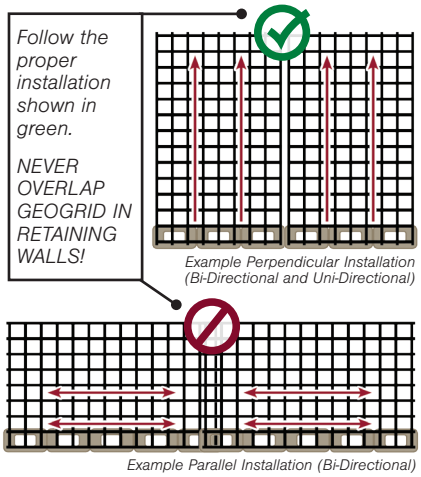

Example Perpendicular Installation (Bi-Directional and Uni-Directional)

Example Parallel Installation (Bi-Directional)



Road Base Geogrid

SRW road base geogrid provides excellent stress transfer on roadway projects, aiding in even distribution of load weight and preventing shifting of base material to extend the life of the road.

Benefits

- Stabilizes road base
- Provides excellent stress transfer
- Prevents deterioration/shifting of base material
- Increases road life span

Applications


- Sub-Grade Stabilization
- Soft Soils Under Embankments

RB 11 • Road Base Geogrid

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW RB11	12´x150´	200.00	1
GSRW RBPP 11	13.1´x246´	358.07	1

RB 12 • Road Base Geogrid

PART #	SIZE	SQ YDS/ROLL	QUANTITY
GSRW RB 12	12´x150´	200.00	1
GSRW RBPP 12	13.1´x164´	238.71	1

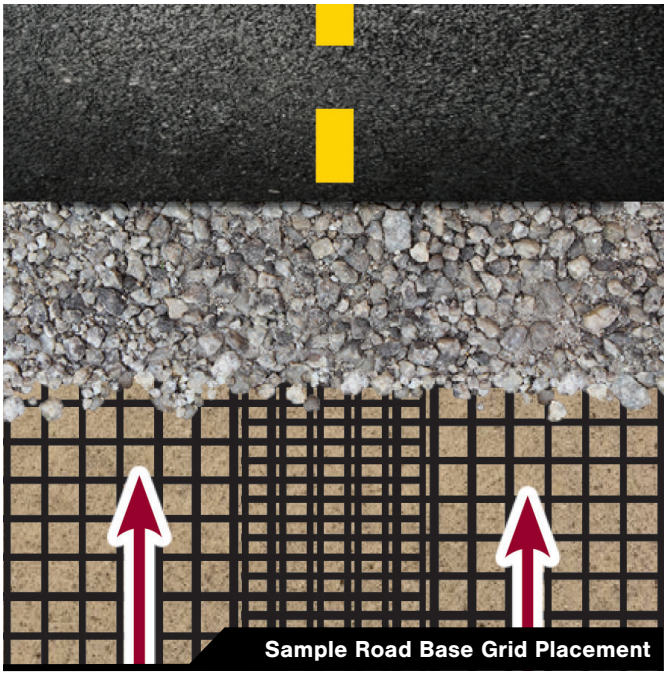

GEOGRID SPECIFICATIONS

PROPERTIES	Units	3 Series	5 Series	7 Series	8 Series	9 Series	10 Series
Long Term Design Strength	lb/ft, MD	1161	2064	2867	3555	4329	5160
Aperture Size (avg)	MD x CMD	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"
Design Strength Properties	RFCR/RFID /RFD	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.1 /1.05
Wide Width Tensile Strength	% Ultimate, MD	2025	3600	5000	6200	7550	9000
Roll Widths	ft	4, 6, 12	6, 12	6, 12	12	12	12
Comparitive Products	—	Mirafi 2XT Strata SG150	Mirafi 3XT Strata SG200	Mirafi 5XT Strata SG350	Mirafi 7XT	Mirafi 8XT Strata SG550	—

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

ROAD BASE GRID SPECIFICATIONS

PROPERTIES	Units	RB11	RB12
Ultimate Strength	MD XMD	2388 3870	2388 5268
Initial Modulus	MD XMD	178,000 172,900	178,000 235,000
Load at 2% Strain	MD XMD	526 578	526 797
2% Secant Moduli	MD XMD	26,300 28,900	26,300 39,850
Aperture Size (avg)	MD x CMD	1" x 1"	1" x 1"
Roll Widths	ft	12	12
Comparitive Products	—	Mirafi BasX-11	Mirafi BasX-12

Segmental Retaining Walls—It's Our Business!

From its inception, SRW Products has specialized in retaining wall products that are built to last. From SRW Adhesive and geotextiles to sealers and preliminary designs, you can count on our time-tested products, as well as our new, innovative solutions.


After all, we are SRW Products, no one does it better!



SRW Adhesive

SRW Adhesive has been time-tested and proven its performance in countless projects for over 25 years.

See pages 6–7

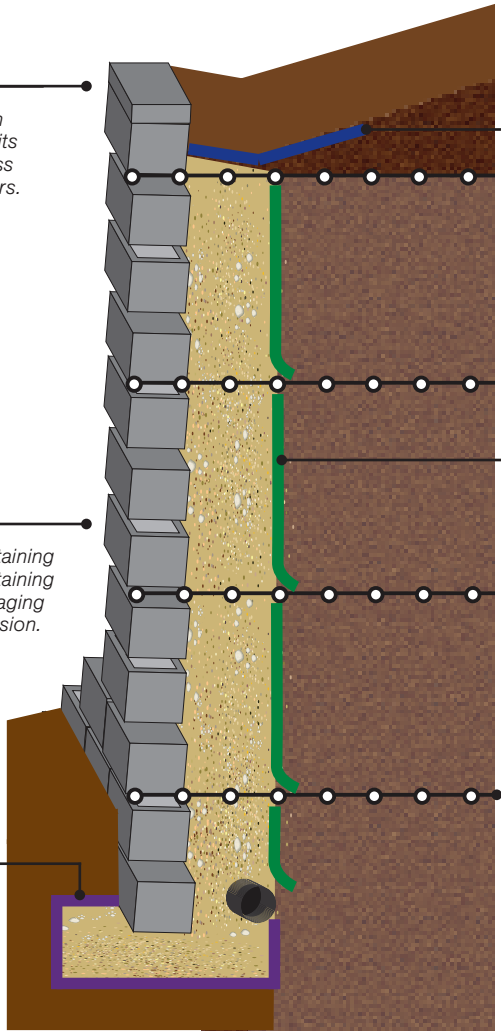

NW4.5

Used as separation at the top of the wall to prevent soil migration into the drainage aggregate.

See page 46





RWX

Specialty Seal™ RWX Retaining Wall X-treme protects retaining wall blocks against damaging elements like water intrusion.

See page 26

SB3

Used as filtration behind the retaining wall, keeping debris out and water flowing through.

See page 42





SS5

Used to separate the leveling pad materials from the sub-base which increases strength.

See page 45


SRW Geogrid

SRW geogrid stabilizes retaining walls, preventing premature wall failure and increasing life span.

See page 50



QUICK TIP: We Have Specialty Retaining Wall Products and Services Too!

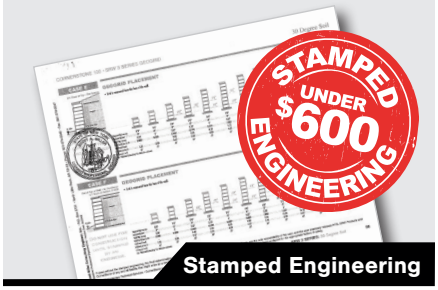

See page 54 & 55



See page 53



See page 53



Sleeve-It™

When Your Wall Needs a Fence, Sleeve-It

The patented Strata Sleeve-It System (rail integration device) is a code-compliant, fence-post anchoring system that integrates stable fence footings into the support structure of retaining walls, while the retaining wall is being constructed.


Benefits

- Meets all requirements of Section 1607.7.1 of the IBC code for fences and guards
- Maximizes usable real estate at the top of a retaining wall
- Reduces risk for retaining wall designers
- Shortens construction time for walls with summit fencing
- Can be used with chain link fences up to 8ft and ornamental fences (wooden, etc.) up to 6ft. max post size 4″x4″

Sleeve-It

PART #	SIZE	QUANTITY
GSRW SLEEVIT 1224-R	24″x12″	4/CTN



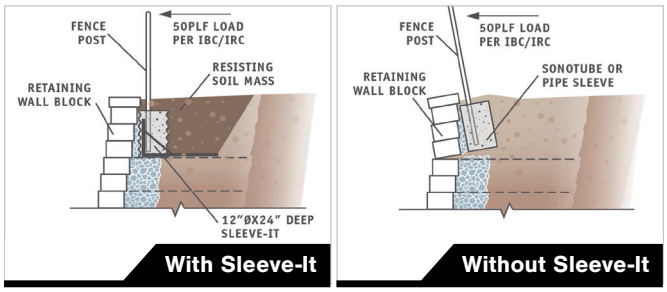

Earthworks™

No Concrete Footings, No Mortar, No Kidding!

Build beautiful and durable retaining walls at an astonishingly low cost! Earthworks retainers work on standard concrete block and create a mechanical connection with geogrid making it a winning combo for strength and longevity. The retainers create a natural setback making them easy to use and install. Earthworks is a low cost alternative and works for any size wall.

Benefits

- Saves time and money
- Provides strength and longevity
- Easy to use and install
- Works on any size wall

Earthworks

PART #	SIZE	QUANTITY
EAR8/EAR12	8″ & 12″	250/CTN
EAR10/EAR12-8	10″ & Transition	250/CTN
EAR COR	Corner Spacers	100/CTN





ONLINE RESOURCES

Our website provides a wealth of resources about our retaining wall products. Go to *www.bitly.com/SRWgeogrid for more information about Sleeve-It, Earthworks, and HTS Hardscape Technical Services. You'll find applications, reference charts and instructional diagrams.*



Stamped Engineering

Save big! Stamped engineering for retaining walls* for under $600 and in as little as 7 days!


Building codes generally require a building permit and structural wall design prepared by a qualified engineer for retaining walls as short as 2´ in exposed height. Requirements will vary but HTS (Hardscape Technical Services) brought to you by SRW makes this process easy and quick!

What YOU Do

- Obtain soil sample or soil report, site photos and wall sketches
- Send Stamped Engineering Request Form with samples, photos and sketches to us by mail or e-mail

What WE Do

- Send your wall request to a qualified engineer and obtain stamped engineering
- Send The Pros Guide for specific block system with step-by-step instructions and material estimations
- Send stamped design table and letter from engineer

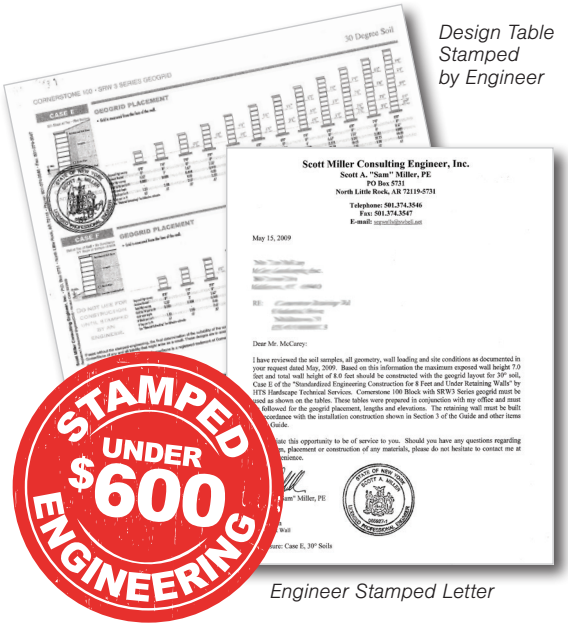


Design Table Stamped by Engineer

Engineer Stamped Letter

FREE Preliminary Designs

Let SRW take the guesswork out of preparing estimations for retaining wall materials.

Free designs are available to help your contractors prepare accurate retaining wall estimations using SRW products. Contact your Territory Manager for more details.

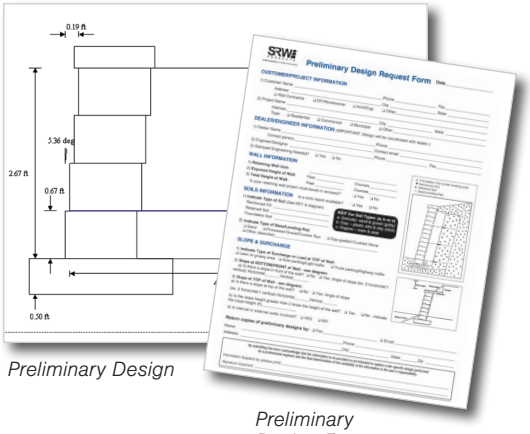

Preliminary Design

Preliminary Design Form

QUICK TIP: HTS Pros Guides & Stamped Engineering

Stamped engineering is available for the retaining wall blocks featured in The Pros Guide on the next page. Refer to the Pros Guide for more information on walls that will qualify for Stamped Engineering with HTS.

ONLINE RESOURCES: Visit These Pages

Stamped Engineering Form: *bitly.com/stampedform*

Preliminary Design Form: *bitly.com/prelimform*

More Info about HTS: *bitly.com/SRW-HTS*

**May apply to walls that are 8´and under.*

HTS—The Pros Guide

The “missing link” for planning, designing, installing and obtaining stamped engineering for your retaining wall project!


The Pros Guide shows how to plan, estimate materials and build quality retaining walls 8´ and under. This step-by-step guide makes it easy for you or your customers and may be a shortcut to stamped engineering for under $600. See previous page for details.

Retail-Ready HTS “The Pros Guide”


BLOCK SYSTEM	PART #	QUANTITY
Allan Block® Retaining Wall Systems		
AB® Collection	HTS AB COLLECT RET	10 BOOKS/BOX
AB® Europa Collection	HTS AB EUROPA RET	10 BOOKS/BOX
Anchor™ Retaining Wall Systems		
Diamond	HTS DIA RET	10 BOOKS/BOX
Diamond Pro/Stone Cut	HTS DIPRO RET	10 BOOKS/BOX
Highland	HTS HIGH RET	10 BOOKS/BOX
Windsor	HTS WINDSOR RET	10 BOOKS/BOX
Borgert Products		
PanoMur®	HTS PANO RET	10 BOOKS/BOX
Cambridge Pavers		
Cambridge Sigma 6™	HTS CAMB SIGMA6 RET	10 BOOKS/BOX
Cambridge Sigma 8™	HTS CAMB SIGMA8 RET	10 BOOKS/BOX
CornerStone® Retaining Wall Systems		
CornerStone 100	HTS CS 100 RET	10 BOOKS/BOX
FrogStone	HTS FROG RET	10 BOOKS/BOX
MagnumStone	HTS MAGNU RET	10 BOOKS/BOX
StoneLedge	HTS STLED RET	10 BOOKS/BOX
Mirastone	HS MIRA RET	10 BOOKS/BOX
County Materials		
County Block™	HTS CNTY BLOCK RET	10 BOOKS/BOX
County Jumbo	HTS CNTY JUMBO RET	10 BOOKS/BOX
County Tribute™	HTS CNTY TRIBUTE RET	10 BOOKS/BOX
County Rib Rock	HTS CNTY RIBROCK RET	10 BOOKS/BOX
County Integrity™	HTS CNTY INTEGRITY RET	10 BOOKS/BOX
Earthworks™		
8″	HTS EAR8 RET	10 BOOKS/BOX
12″	HTS EAR12 RET	10 BOOKS/BOX
ICD® Retaining Wall Systems		
Stonewall Select	HTS ICD STNEWLL RET	10 BOOKS/BOX
Keystone® Retaining Wall Systems		
Compac	HTS KS COMPAC RET	10 BOOKS/BOX
Country Manor	HTS KS CT MANOR RET	10 BOOKS/BOX
Verazzo	HTS KS VERAZZO RET	10 BOOKS/BOX
Lehi Block Incorporated		
ArtStone	HTS ARTSTONE RET	10 BOOKS/BOX
Pyzique® Retaining Wall Systems		
Maytrx	HTS MAYTRX RET	10 BOOKS/BOX
RisiStone Inc. Retaining Wall Systems		
Pisa2®/RomanPisa®	HTS PISA RET	10 BOOKS/BOX
Techo-Bloc		
Mini-Creta	HTS MINI-CRETA RET	10 BOOKS/BOX
Monumental	HTS MONUMENTAL RET	10 BOOKS/BOX
Versa-Lok® Retaining Wall Systems		
Standard	HTS VLSTD RET	10 BOOKS/BOX
Mosaic	HTS MOSAIC RET	10 BOOKS/BOX
Square Foot	HTS VLSQFT RET	10 BOOKS/BOX
WestBlock® Retaining Wall Systems		
Stonewall	HTS WBSTNEWALL RET	10 BOOKS/BOX



Planning

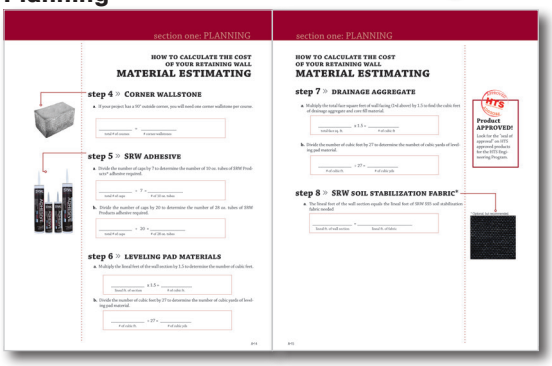

Design Tables

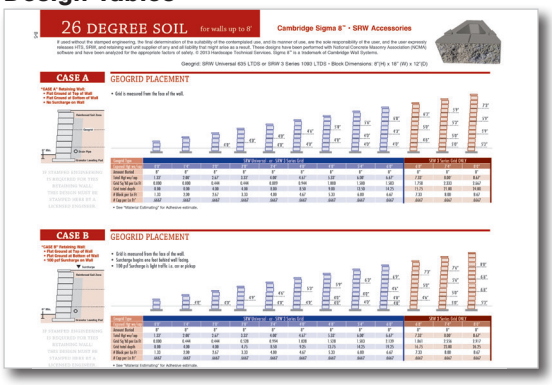

Installation





Silt Fence & Stakes

SRW Silt Fence is a woven fabric that temporarily controls sediment on construction sites to protect water quality in nearby streams, rivers and lakes from sediment in storm water runoff. SRW Silt Fence comes with pre-attached posts. Stakes are pointed (like a pencil) for easy installation.



Silt Fence • Black • 70g • 1.25″x1.25″x42″ Stakes

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF S03100	3´x100´	13 Stakes	48/PLT
FCMF S0310026	3´x100´	26 Stakes	20/PLT
FCMF S031500	3´x1500´	Fabric Only	9/PLT

Silt Fence • Orange • 70g • 1.25″x1.25″x42″ Stakes

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMFO S03100	3´x100´	13 Stakes	48/PLT
FCMFO S031500	3´x1500´	Fabric Only	9/PLT

Silt Fence Stakes • *Must be purchased in pallet quantities*

PART #	SIZE	STAKES/ROLL	QUANTITY
FCMF Stake42	42″x1.25″	Stakes Only	1,000/PLT
FCMF Stake48	48″x1.5″	Stakes Only	25/BNDL–750/PLT

Drainfield

SRW Drainfield polyester geotextiles are commercial-grade drainage fabrics with high puncture resistance. They provide high water flow rates and excellent filtration.



DF1.5 • Spunbond

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD1.5 03300	3´x300´	100.00	40/PLT
FD1.5 04300	4´x300´	133.33	40/PLT
FD1.5 05300	5´x300´	166.67	35/PLT
FD1.5 06300	6´x300´	200.00	35/PLT
FD1.5 12300	12´x300´	400.00	4/BNDL

DF2 • Spunbond

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FD2 03300	3´x300´	100.00	30/PLT
FD2 04300	4´x300´	133.33	30/PLT
FD2 06300	6´x300´	200.00	35/PLT
FD2 12300	12´x300´	400.00	4/BNDL

Rock Log

Rock logs are a woven monofilament tube sock filled on site with rock or aggregate to minimize runoff on hard surfaces or landscape areas.



Benefits

- First and last line of defense for filtration in roadways
- Traps particle sizes as small as .1 fine sand

Rock Log

PART #	SIZE	QUANTITY
FCMBR 7″8′	7″x8′	5/CTN

Silt Sock

Silt Sock is environmentally friendly for wetlands, waterways and general areas under construction.



Benefits

- Filters 90% of sediment from runoff
- Easy installation, low maintenance
- No equipment needed to install, reusable

Silt Sock

PART #	SIZE	QUANTITY
FCMSS 0820 BLK	8″x20′	8/PLT

Straw Wattles

Use these weed-free wattles over bare soil or in conjunction with erosion control blankets, on steep slopes, around drains for inlet protection or as perimeter control for jobsites.



Benefits


- Helps stabilize slopes by slowing, spreading and filtering overland water flow
- Flexible and conforms to the surface

Straw Wattles*

PART #	SIZE	QUANTITY
FCMWS 0925	9″x25′	10/BNDL
FCMWS 1220	12″x20′	7/BNDL

**Quantities may vary according to weight*

QUICK TIP: Keep Your Erosion Control Products in Place!

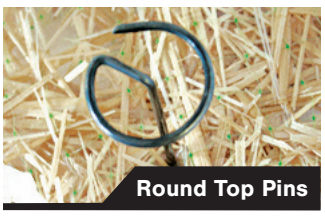



Round Top Pins and Landscape Staples

Round Top Pins and Landscape Staples prevent your erosion control products from movement and allows for easy visual inspection.

Don't miss our pin pounder and staple setter! They feature magnetic ends to make application easier.

See page 74 for ordering information.



Erosion Control Blankets

Erosion Control Blankets are produced from a material that is designed to slow down the speed at which water moves across the surface. These blankets also provide excellent protection for seeds and newly sprouted grasses or plants. SRW Products offers a variety of materials to fit your projects needs.

Straw Blankets

Benefits

- Certified 100% weed-free straw
- Erosion control up to one year
- Serves as a mulching layer

SR-1 • Straw Blankets • Single Sided*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB STSINGLE 4	4´x50´	22.22	40/PLT
FCMB STSINGLE	8´x112.5´	100.00	30/BNDL

SS-2 • Straw Blankets • Double Sided*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB STDOUBLE	8´x112.5´	100.00	30/BNDL


Straw Blanket

Coconut Blankets

Benefits

- Erosion control up to three years
- Serves as a mulching layer

CS-3 • Coconut/Straw Blankets • Double Sided*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB CS81125	8´x112.5´	100.00	30/BNDL

CC-4 • Coconut Blankets • 100% Coconut*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB CO81125	8´x112.5´	100.00	30/BNDL


Coconut/Straw Blanket

Turf Reinforcement Mat


Benefits

- Erosion control greater than three years
- Turf reinforcement for more severe slope applications

PP5-10 • Turf Reinforcement Mat*

PART #	SIZE	SQ YDS/ROLL	QUANTITY
FCMB TRM 81125	8´x112.5´	100.00	20/BNDL


Coconut Blanket

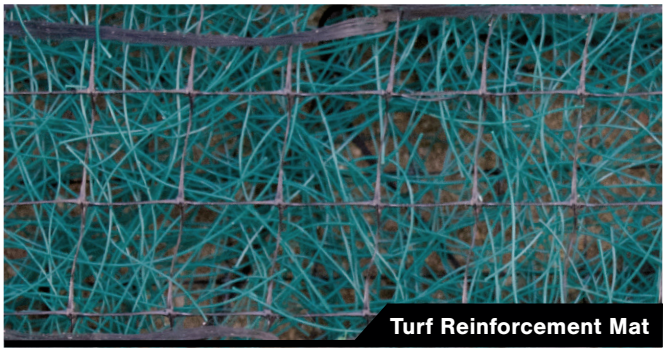
Turf Reinforcement Mat

CUSTOMER SERVICE
Looking for specs or need more options?
Call us at 800-752-9326.

*Quantities may vary according to weight



NEW

Tree Watering Systems

Protect your tree investments and otpimize growth with slow release Tree Watering Bags and Rings. They are easy to install, save time and money, and ideal for trees up to 6″ in diameter.

Tree Watering Bags

Benefits

- Holds up to 20 gallons
- Wraps trunk sizes of 4″ or chain multiple bags together for larger trunks
- 5-8 hour water release
- Commercial grade material and heavy duty zipper
- No tools required for installation



Tree Watering Bags

PART #	SIZE	AMT PER CTN	QUANTITY
TREE BAG 20G CTN 36	20 gal	36/CTN	35/PLT

Tree Watering Rings

Benefits

- Holds up to 15 gallons
- Fits trees up to 6″ in diameter
- Continuous irrigation system from two valves for even distribution
- 5-8 hour drip time
- Durable and reusable with a low profile design
- Reduces transplant shock and drought stress



Tree Watering Rings

PART #	SIZE	AMT PER CTN	QUANTITY
TREE RING 15G CTN 24	15 gal	24/CTN	42/PLT



Dandy Products

Soil erosion during construction can find its way to the city's water system through storm sewers, grates and inlets. Because of the potential danger to our environment and sewer systems, the government has required contractors to use a professional-grade inlet filter and to erect their own sediment control solutions and measures when starting any new project. SRW partners with Dandy Products to ensure your small or large projects are protected.

Benefits

- Unique patented designs
- Easy-to-see bright orange solutions
- Easy to install, maintain, inspect and reuse

Dandy Curb Sack®

PART #	SIZE	QUANTITY
DCS 24 24	24″x24″	5/CTN
DCS 30 12	30″x12″	5/CTN
DCS 36 24	36″x24″	5/CTN

Dandy Curb Bag®

PART #	SIZE	QUANTITY
DCB 36 24	36″x24″	5/CTN

Dandy Sack®

PART #	SIZE	QUANTITY
DS 24 24	24″x24″	5/CTN
DS 36 24	36″x24″	5/CTN
DS 48 24	48″x24″	5/CTN
DS 30 30	30″x30″	5/CTN
DS 36 36	36″x36″	5/CTN


Dandy Bag®

PART #	SIZE	QUANTITY
DB 36 36	36″x36″	5/CTN
DB RD 24	24″ ROUND	5/CTN
DB 24 24	24″x24″	5/CTN
DB 36 24	36″x24″	5/CTN


Dandy Dewatering Bag®

PART #	SIZE	QUANTITY
DDB 10 10	10´x10´	1
DDB 15 15	15´x15´	1
DDB 6 6	6´x6´	1
























QUICK TIP: Looking for More?

We've worked to deliver the best, most comprehensive erosion and sediment control solutions available in the industry. Between creating our own products and developing partnerships with industry leaders like Dandy Products, we've got you covered. Every construction project needs an SRW Products approved solution.

Looking for something else you don't see here?
Contact your Territory Manager today!



The Best Blade for Every Material

SRW PRODUCTS Diamond Blades APPLICATION CHART	Stone			Pavers		Wetcast		Concrete							Other	
Blade Type	Natural Stone	Concrete Pavers	Clay Pavers/Brick	Wetcast	Manufactured Stone	Retaining Wall/ Concrete Block	High PSI Concrete (5000 or higher)	Rebar Reinforced Concrete	Wire Mesh Reinforced Concrete	Green Concrete (12 hrs. or less)	Green Concrete (20 hrs. or more)	Cured Concrete	Asphalt	Porcelain
GENERAL PURPOSE	X	X	X	X	X	X			X		X	X		
HARD MATERIAL	X	X	X	X			X	X	X			X		X
ALL PURPOSE	X	X	X	X	X	X		X	X		X	X	X	
ABRASIVE MATERIAL										X			X	



NEW Packaging Updates

Same blades, new package!

SRW diamond blades have a new look. Category names and colors have been changed.

Old	New
Hard Material, Yellow	Hard Material, Yellow
Universal/General Purpose, Orange	General Purpose, Blue
X-treme Abrasive Material, Green	Abrasive Material, Green
All Purpose, Dark Red	All Purpose, Red




Universal/General Purpose




General Purpose

NEW Cup Wheels

Diamond cup wheels for grinding of concrete and masonry applications. See next page for ordering information.

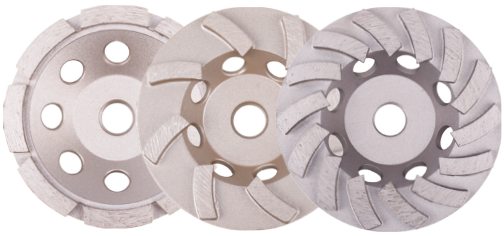


Blade Style Variations

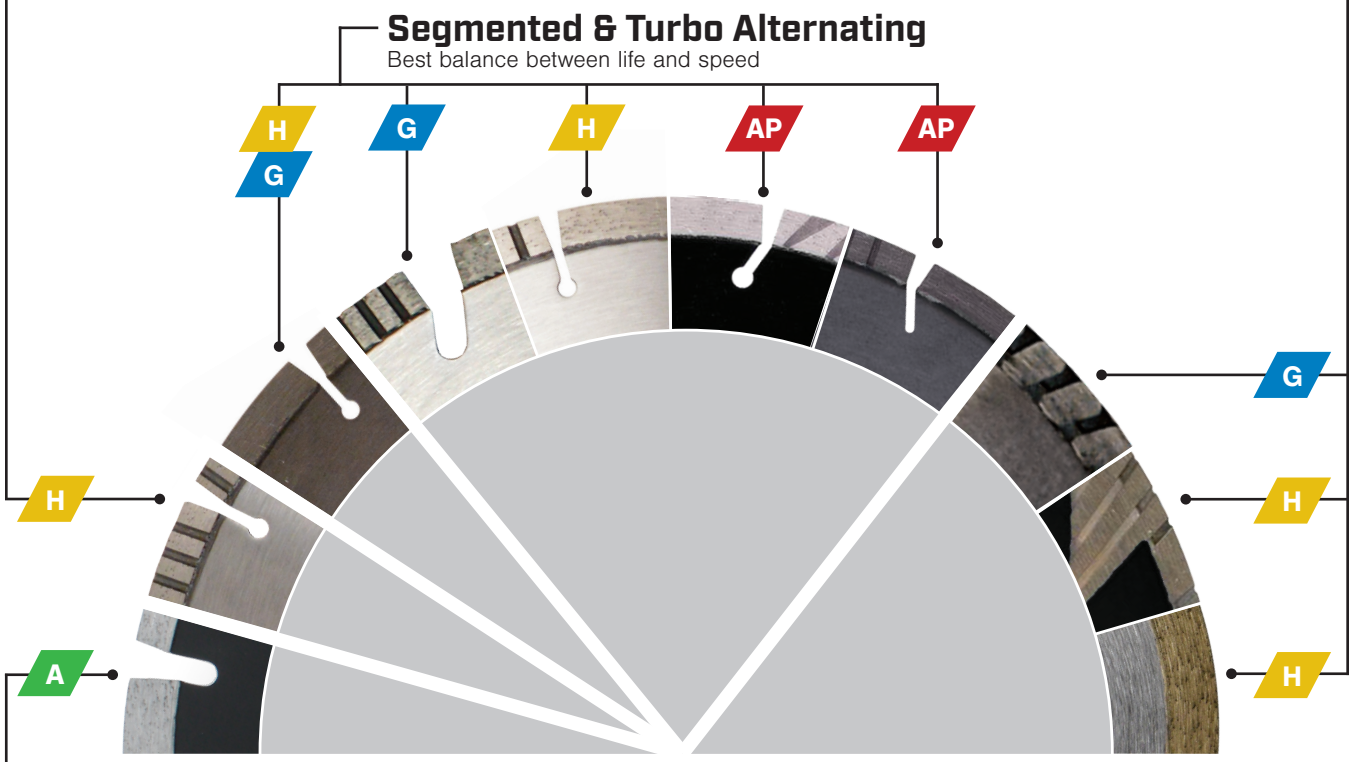

General Purpose | Hard Material | All Purpose | Abrasive Material


Providing Quality Diamonds

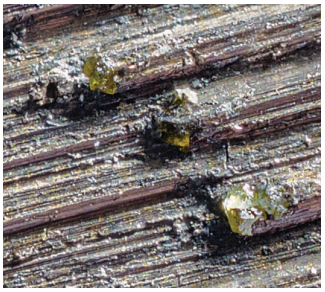

Closeup of diamonds in blade



Closeup of width of segment

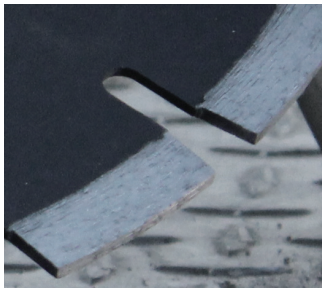

Closeup of height of segment

It's a common misconception that the height of the segment determines a diamond blade's longevity. Although this is important to the specific function of the blade, the width of the segment and the quality of the diamonds in the blade are much more important factors for long-term performance.

Single Row Cup Wheel

Single row for smooth grinding and diamonds on the outside edge ideal for edging.



Single Row Cup Wheel

PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 SR	4.5″	5/8″-11 THREADED	SINGLE ROW	STANDARD

Single Turbo Cup Wheel

Single turbo style for increased grinding speed and ideal for removing material in high spots.



Single Turbo Cup Wheel

PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 ST	4.5″	5/8″-11 THREADED	SINGLE TURBO	STANDARD

Double Turbo Cup Wheel

Double turbo style for faster/more aggressive grinding and added diamonds/segments for longer life.



Double Turbo Cup Wheel

PART #	SIZE	ARBOR	STYLE	GRADE
BCW 4.5 DT	4.5″	5/8″-11 THREADED	DOUBLE TURBO	STANDARD

General Purpose Blades

Look for the Blue Blades

SRW's blue General Purpose blades are engineered to meet the challenges of all general purpose cutting conditions.

Benefits

- Standard and premium options available
- Specifically engineered for use with a variety of general purpose cutting conditions
- Available in 3 different blade styles

Applications

- Brick/Clay
- Cured Concrete
- Sandstone
- Limestone
- Travertine
- Retaining Wall Block
- Concrete Block
- Reinforced Concrete With Wire Mesh



*Previous packaging was orange

General Purpose Diamond Blades - Blue *(previously orange)*

PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	GRADE
BU04.5	4.5″	.080″/8 mm	7/8″-5/8″	TURBO RIM	STANDARD
BU07	7″	.095″/10 mm	U/A	TURBO RIM	STANDARD
BU10	10″	.095″/10 mm	U/A	SEG	STANDARD
BGPC10	10″	.095″/10 mm	7/8″-5/8″	SEG	PREMIUM
BU12	12″	.125″/10 mm	1″/20 mm	SEG	STANDARD
BGPC12	12″	.125″/12 mm	1″/20 mm	SEG	PREMIUM
BU14	14″	.125″/10 mm	1″/20 mm	SEG	STANDARD
BGPC14	14″	.125″/12 mm	1″/20 mm	SEG	PREMIUM
BGPZ14	14″	.125″/15 mm	1″/20 mm	SEG TURBO ALT SEG	PREMIUM

QUICK TIP:
Buy Our Top Performer

Order our 14″ segmented premium blade. It's our top performing blade because it offers both the best cut and long-lasting performance. Made with the highest quality diamonds, this blade is sure to exceed your expectations. **Order using part# BGPC14 today!**

Hard Material Blades

Look for the Yellow Blades

SRW's yellow Hard Material blades are designed to provide fast cutting with minimal spalling.

Benefits

- Standard and premium options available
- Fast cutting with minimal spalling
- Available in 5 different blade styles

Applications

- Cured Concrete
- Granite
- Bluestone
- Wetcast
- Porcelain
- Reinforced Concrete With Wire Mesh/Rebar
- Pavers
- Natural Stone



Hard Material Diamond Blades - Yellow

PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	GRADE
BPPB7	7″	.060″/10 mm	7/8″-5/8″	CONT RIM	PREMIUM
BPPB10	10″	.060″/10 mm	7/8″-5/8″	CONT RIM	PREMIUM
BPPC12	12″	.125″/12 mm	1″/20 mm	SEG TURBO	STANDARD
BPPC14	14″	.125″/12 mm	1″/20 mm	SEG TURBO	STANDARD
BGPP14	14″	.125″/12 mm	1″/20 mm	SEG	PREMIUM
BUSA HM14	14″	.125″/12 mm	1″/20 mm	SEG TURBO ALT SEG	PREMIUM
BSWP14	14″	.095″/9 mm	1″/20 mm	TURBO RIM	PREMIUM

QUICK TIP:
Cut Natural Stone with Ease

Our stone blade is designed for the best cut of natural stone and wetcast materials — **order part# BSWP14 today!**

All Purpose Blades

Look for the Red Blades

SRW's red All Purpose blades are designed to cut a variety of materials from concrete and asphalt to stone. We pride ourselves on offering the most comprehensive diamond blade solutions to meet your unique needs. Choose SRW All Purpose diamond blades for everyday projects with a variety of cutting needs.



Benefits

- Standard and premium options available
- Can be used on a wide variety of materials

Applications

- Brick/Clay
- Asphalt
- Sandstone
- Limestone
- Travertine
- Retaining Wall Block
- Concrete Block
- Reinforced Concrete With Wire Mesh/Rebar
- Green/Cured Concrete

All Purpose Diamond Blades - Red

PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	GRADE
BPAP14	14″	.125″/13 mm	1″/20 mm	SEG TURBO ALT SEG	PREMIUM
BVAP14	14″	.125″/13 mm	1″/20 mm	SEG TURBO ALT SEG	STANDARD

Abrasive Material Blades

Look for the Green Blades

SRW's green Abrasive Material blades are specifically designed for cutting abrasive materials that wear away most blades quickly. Make sure your diamond blade can stand up against any material, no matter how abrasive. Buy from SRW and choose only the best. Made with the highest quality diamonds, this diamond blade is sure to exceed your expectations.



Benefits

- Premium blade for long-term reliability
- For use on even the most abrasive materials

Applications

- Asphalt
- Green Concrete (12 hours or less)

Abrasive Material Diamond Blades - Green

PART #	SIZE	THICKNESS/ SEG HEIGHT	ARBOR	STYLE	GRADE
BAMA14 ASPHALT	14″	.125″/10 mm	1″/20 mm	SEGMENTED WITH DROP SEG	PREMIUM

CUSTOMER SERVICE
Need help choosing a blade style for your particular project? We're here to help! Call us at 800-752-9326.



Choose the Best Fiber for the Strength You Need

SRW PRODUCTS

Concrete Fibers
APPLICATION CHART

Reinforcement Fiber	Application: Slab on Grade/ Sidewalks/Driveways	Stamped Concrete/ Colored/Decorative	Stucco	Blast Panels/ Mining/Petro-Chem	Pool Decks	Precast	Architectural Precast	Exposed Aggregate	Shotcrete	Benefits: WWM Replacement	WWF Replacement	Plastic Shrinkage	Temperature Shrinkage	Type: Micro	Macro
M-Macro	x			x	x	x			x	x					x
F-Macro	x			x	x	x			x	x					x
ACR1	x	x	x		x	x	x	x	x		x	x	x	x	
Fibrillated	x				x	x			x		x	x	x	x	
ACR1/2	x	x	x		x	x	x	x	x			x		x	
Monofilament	x	x	x		x	x		x	x			x		x	

Want to match your current fiber to SRW? Call 800-752-9326 for our cross-reference chart today!



Replace Wire Mats

M-Macro

This polypropylene fiber replaces wire mats and light rebar. Perfect for precast, shotcrete and underground mining and tunneling applications. Average dosage is 3 pounds for most applications.



M-Macro • Polypropylene Fiber

PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER MMAC3	8–3 lb BAGS	2″	36 CTNS/PLT	864 lbs
CFIBER MMAC4	6–4 lb BAGS	2″	36 CTNS/PLT	864 lbs
CFIBER MMAC5	5–5 lb BAGS	2″	36 CTNS/PLT	900 lbs

Quantities subject to change

F-Macro

This polypropylene/polyethylene fiber replaces wire mats and light rebar. Perfect for slab on ground, bridge decks, precast and other DOT-approved projects. Average dosage is 3 pounds for most applications.



F-Macro • Polypropylene/Polyethylene Fiber

PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER FMAC3	8–3 lb BAGS	1.5″	36 CTNS/PLT	864 lbs
CFIBER FMAC4	6–4 lb BAGS	1.5″	36 CTNS/PLT	864 lbs
CFIBER FMAC5	5–5 lb BAGS	1.5″	36 CTNS/PLT	900 lbs

2″ available upon request

Replace Wire Mesh

ACR1 *formerly AC60*

This 2-in-1 acrylic fiber provides secondary reinforcement strong enough to replace wire mesh while also eliminating plastic shrinkage cracking up to 100%. 1 pound dosage rate for most applications.



ACR1 • Acrylic Reinforcement Fiber

PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER ACR1	28–1 lb BAGS	1/4–1/2″	36 CTNS/PLT	1008 lbs

Fibrillated

Our fibrillated polypropylene fiber is designed to prevent plastic shrinkage cracking and control non-structural temperature shrinkage cracking. This reinforcement fiber can even replace wire mesh.



Fibrillated • Polypropylene Fiber

PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER F3/4	16–1 1/2 lb BAGS	3/4″	36 CTNS/PLT	864 lbs

Eliminate Plastic Shrinkage

ACR1/2 *formerly AC50*

ACR1/2 eliminates plastic shrinkage cracking up to 100%, outperforming traditional non-acrylic fibers by 25%. This fiber performs well on architectural precast projects. 1/2 pound dosage rate for most applications.



ACR1/2 • Acrylic Reinforcement Fiber

PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER ACR1/2	60–1/2 lb BAGS	1/4″	36 CTNS/PLT	1080 lbs

Monofilament

Our monofilament polypropylene fiber is specifically engineered to inhibit and control the formation of early age cracks in concrete. This micro fiber can be used in many applications including stucco and exposed aggregate.



Monofilament • Polypropylene Fiber


PART #	SIZE	LENGTH	QUANTITY	LBS/PLT
CFIBER M1/2	24–1 lb BAGS	1/2″	36 CTNS/PLT	864 lbs
CFIBER M1/2 3OZ	24–3 oz BAGS	1/2″	36 CTNS/PLT	162 lbs

Choose the Right Fiber for Your Project

Make concrete stronger and increase structural integrity while cutting project time and labor costs in half. Save big on material, storage and shipping. Performance verified by third-party testing. Contact your Territory Manager today or call 800-752-9326 for more information.





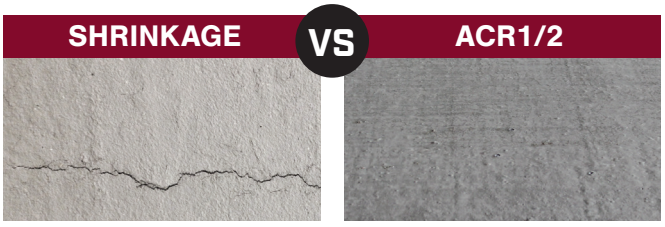

Acrylic Fibers

- Superior chemical bond with concrete
- High impact resistance & durability
- Alkali resistant, non-corrosive and insoluble in water
- Exceed ICC standards for WWM

Polypropylene Fibers

- Contact bond with concrete
- High impact resistance & durability
- Alkali resistant, non-corrosive and insoluble in water

QUICK TIP:
Cutting Concrete?

SRW offers many blades specifically designed for cutting concrete quickly and with minimal spalling.

See pages 61–65 for ordering.



See pages 36–39 for ordering information.

1-Step

This 1-step sealer easily and quickly provides 2 levels of protection for concrete surfaces. The breathable seal weatherproofs and protects to extend the life of concrete surfaces.



pg 37

X-treme

Concrete Cure & Seal X-treme is our top performer. It contains the highest quality acrylics on the market today to protect and beautify concrete with a high-gloss, wet-look finish.



pg 37

Select

Concrete Cure & Seal Select uses a combination of premium acrylics to create a reliable barrier of protection. Its high-gloss, wet-look finish is sure to add beauty and value to any project.



pg 38

Green

Concrete Cure & Seal Green is best suited for use on freshly poured concrete. This film-forming sealer prevents rapid moisture evaporation that leads to shrinkage cracking.



pg 38

True Seal

True Seal provides a penetrating protective barrier while leaving the surface true to its natural appearance. This high quality sealer extends the life of any concrete project.



pg 39

Finishing

Designed for use on previously sealed concrete surfaces, this sealer cuts through the existing acrylic film and chemically bonds to the concrete for added protection.



pg 39



NEW

Path Stabilizer

Create long-lasting, dust-free pathways and patio areas. Safe for use around plants and animals. It reduces weed growth, dust and erosion from weather and foot traffic, while enhancing the surface.



Benefits

- One easy to use formula ideal for both commercial and residential applications
- Liquid bonding agent that controls dust
- Stabilizes pathways and patios
- Minimizes tracking and weed growth

Applications

- Decomposed Granite
- Crushed Stone 3/8″–1/4″ minus

Path Stabilizer

PART #	SIZE	AMT PER CTN	QUANTITY
TAC PATH 5GAL	5 gal	1	36/PLT

Mulch Stabilizer

Keep your mulch looking amazing all season long with this must-have landscaping product. It can even be used on sand and dirt in decorative areas to control dusting.



Benefits

- Locks mulch in place
- Easy to use
- Enhances color and prevents fading
- Dries clear
- Flexible bond
- Helps prevent weed growth

Applications

- Colored and Natural Mulch
- Synthetic Mulch
- Pine Straw
- Sand and Dirt

Mulch Stabilizer

PART #	SIZE	AMT PER CTN	QUANTITY
TAC MULCH CTN	1 gal	4/CTN	36 CTNS/PLT
TAC MULCH 5GAL	5 gal	1	36/PLT

QUICK TIP: Don't Forget the Sprayer

Our Mulch Stabilizer is easy to use—spray it on!
See page 72.

StringAlong

Sold Exclusively by SRW Products


The SRW Products StringAlong collar makes raising and lowering elevations easy. It contains small teeth and a lock notch to ensure a tight string line. These collars are easily visible from a distance, unlike pencil marks and are built to last! Pair with StringAlong Stakes for best results. The unique retail display is built and suitable for counter tops.

Benefits

- Take down the line and put it back up without measuring
- Ability to create three to four different lines from different directions at one time
- It's built to last from nylon with a brass insert and zinc coated thumbscrew
- Fits round stakes up to 1″

Applications

- Hardscaping
- Surveying
- Fencing
- Concrete & Masonry



StringAlong Collar & Thumbscrew



Counter Display



StringAlong Collars

PART #	DESCRIPTION	QUANTITY
FCSTR COLLAR 10 PK	10 pack	10 COLLARS
FCSTR COLLAR REFILL	Refill	48 COLLARS

StringAlong Display

PART #	DESCRIPTION	QUANTITY
FCSTR COLLAR DISP	Display	48 COLLARS

StringAlong Stakes

PART #	DESCRIPTION	QUANTITY
FCSTR STAKE 10 PK	3/4″x24″ Forming Stake	10 STAKES

StringAlong Stakes Combo Pack with StringAlongs

PART #	DESCRIPTION	QUANTITY
FCSTR COMBO	Combo Pack Collars & Stakes	10 COLLARS 10 STAKES

Slit Foam Rollers

The SRW Slit Foam Roller is a must-use product when sealing. It helps ensure even application, preventing problems with installation. Don't get caught without it on your next project.

Benefits

- Applies SRW sealers evenly
- Works great on textured surfaces
- Remains spongy and will not compress

SRW Slit Foam Roller

For use with any SRW sealer (except VOC-labeled).

SRW Slit Foam Roller

PART #	SIZE	QUANTITY
SSSFR CTN	13/16″ ROLLER	12/CTN



SRW Slit Foam Roller X-treme

Specifically designed for use with solvent-based products but works well with all SRW sealers.

SRW Slit Foam Roller X-treme

PART #	SIZE	QUANTITY
SSSFR XTR CTN	1/2″ ROLLER	12/CTN

SR Paver Grip

Add this polypropylene particle mixture to create a textured surface, improving slip resistance. Not visible when dry.

Applications

- **Specialty Seal:** DG, DG VOC
- **Paver Seal:** LG, LGX, LGX VOC, HG, HGX, HGX VOC
- **Premium Stone Seal:** S-HGX, S-HGX VOC
- **Wetcast Seal:** W-HGX, W-HGX VOC
- **Concrete Seal:** WB: All except True Seal, SB: 1-Step, 1-Step VOC, Green, Green VOC, Select, Select VOC, X-treme, X-treme VOC

SRW Slip-Resistant Paver Grip

PART #	SIZE	QUANTITY
SSSR PG	3.2 oz BAG	12/CTN



Professional Sprayers

Hudson® Constructo® Spray Thick™

Benefits

- Galvanized steel
- Can handle up to 35% solids
- Ideal for commercial applications

Applications

- **Specialty Seal:** RWX, DG
- **Paver Seal:** PS, PSX, LG, LGX, HG, HGX
- **Premium Stone Seal:** S-PS, S-HGX
- **Wetcast Seal:** W-PSX, W-HGX
- **Concrete Seal:** WB: All, SB: 1-Step, Green, Select, X-treme, True Seal, Finishing

Hudson Constructo Spray Thick Sprayer

PART #	SIZE	QUANTITY
SSSP SPRAYER GALV	3.5 gal	1/BOX



Hudson Heavy-Duty Acetone Sprayer

Benefits

- For use with acetone-based products
- Ideal for commercial applications

Applications

- **Specialty Seal:** DG VOC
- **Paver Seal:** PS, PSX, LG, LGX VOC, HG, HGX VOC
- **Premium Stone Seal:** S-PS VOC, S-PSX, S-HGX VOC
- **Wetcast Seal:** W-PSX, W-HGX VOC
- **Concrete Seal:** WB: All, SB: 1-Step VOC, Green VOC, Select VOC, X-treme VOC, True Seal VOC, Finishing VOC

Hudson Heavy-Duty Acetone Sprayer

PART #	SIZE	QUANTITY
SSSP SPRAYER POLY	2.5 gal	1/BOX



SRW Heavy-Duty Sprayer

Benefits

- High-output nozzle
- Viton seal
- Adjustable nozzle with mist, spray or stream capabilities
- Extra-thick resin bottle ideal for solvents and chemicals
- Opaque bottle protects light-sensitive chemicals

Applications

- SRW Cleaners
- Disinfectants
- Fertilizers
- Weed Killers/Insecticides

Shows general usage guidelines only. No sprayer is compatible with all cleaners.

SRW Heavy-Duty Sprayer

PART #	SIZE	QUANTITY
SSSP 32OZ SPRAY BOTTLE CTN 6	32 oz	6/CTN

WATCH THE VIDEO!
bitly.com/M3Cvideo





Stretch Wrap

SRW offers a range of stretchable, highly elastic plastic film that keeps items tightly bound.



Stretch Wrap

PART #	SIZE	GAUGE	QUANTITY
SW 1751500 65 GA	17.5″x1500′	65	4/CTN
SW 181500 70 GA	18″x1500′	70	4/CTN
SW 20500 MW	20″x5000′	80	40/PLT

Caulking Guns

Premium



- 18:1 Thrust Ratio
- Professional Grade
- Spout Cutter/Seal Puncture Tool
- Revolving Barrel/Zinc Handle

Premium Caulking Gun

PART #	SIZE	AMT PER CTN
CG00002	10 oz	6/CTN
CG00004	28 oz	6/CTN



Using the Seal Puncture Tool

Standard



- 10:1 Thrust Ratio
- Ladder Hook and Thumb Release
- Smooth Rod Cradle
- Heavy Duty Steel Construction

Standard Caulking Gun

PART #	SIZE	AMT PER CTN
CG00005	10 oz	12/CTN
CG00006	28 oz	6/CTN

Economy



- 3:1 Thrust Ratio
- Non-Drip for Easy Cleanup
- Smooth Rod Cradle
- Heavy Duty Steel Construction

Economy Caulking Gun

PART #	SIZE	AMT PER CTN
CG00001	10 oz	24/CTN
CG00003	28 oz	6/CTN

Fabric Seaming Adhesive

Save time and money with this fast and easy alternative to sewing geotextile fabric. Simply spray and stick!




3M™ Scotch-Weld™ HoldFast 70 Seaming Adhesive

PART #	SIZE	AMT PER CTN
FCA CYLINDER 27.3#	27.3# 3M HOLDFAST	1/BOX
FCA APPLICATOR EX	HOLDFAST EX APPLICATOR 18″	1/BOX
FCA HOSE 25′	HOLDFAST HOSE 25′	1/BOX
FCA SPRAY TIP	QSS HOLDFAST SPRAY TIP	1/BOX

Paver Rail Spikes & Staples

SRW Paver Rail edging can be installed with spikes or staples. We carry an option of 10″ or 12″ spikes for your project needs. Our staples make for a simple install and save you money.

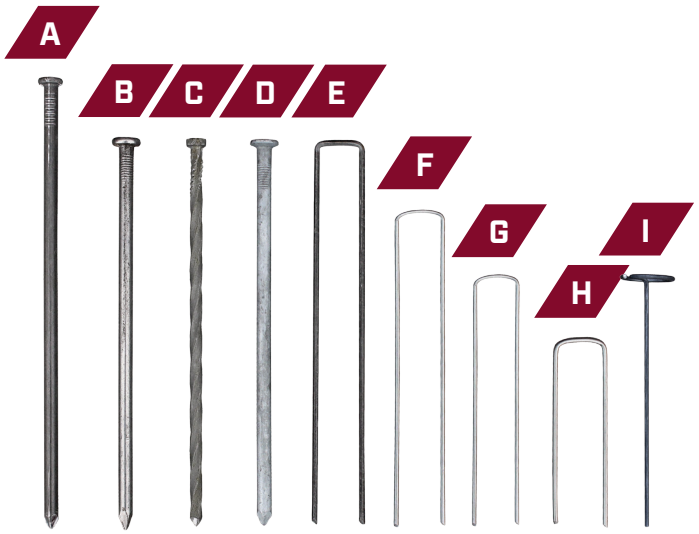

Spikes • Bulk Carton

	PART #	SIZE	AMT PER CTN	QUANTITY
A	FCMST 12-50#	12″ SMOOTH	50 lbs/CTN	48 CTNS/PLT
B	FCMST 10-50#	10″ SMOOTH	50 lbs/CTN	48 CTNS/PLT
C	FCMST 10-50#SS	10″ SPIRAL	50 lbs/CTN	48 CTNS/PLT
D	FCMST 10-50# GALV	10″ GALVANIZED	50 lbs/CTN	48 CTNS/PLT


Paver Rail Staples • 8 Gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
E	FCMST 10500P	10″	500/CTN	48 CTNS/PLT

**Counts vary by weight*

Landscape Staples & Pins

Hold your geotextiles, geogrid and erosion control products in place. Staples feature pointed tips and convenient packaging. 11 gauge; 4″, 6″ or 8″ lengths.

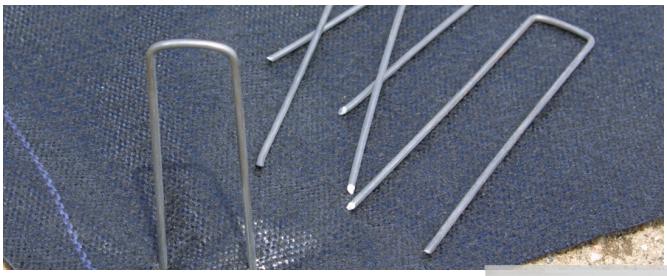





Landscape Staples • Boxed •11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
G	FCMST D	6″	75/BOX*	12 BOX/CTN

Landscape Staples • Bagged •11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
G	FCMST 620240	6″	20/BAG*	12 BAGS/CTN
G	FCMST 650500	6″	50/BAG*	10 BAGS/CTN

Landscape Staples • Bulk Cartons •11 gauge

	PART #	SIZE	AMT PER CTN	QUANTITY
F	FCMST 8500	8″	500/CTN*	50 CTNS/PLT
G	FCMST 61000	6″	1000/CTN*	50 CTNS/PLT
H	FCMST 41000	4″	1000/CTN*	60 CTNS/PLT

Round Top Pins

	PART #	SIZE	AMT PER CTN	QUANTITY
I	FCMST 6-RT1000	6″	1000/CTN*	75 CTNS/PLT

**Counts vary by weight*

Staple Setter & Pin Pounder

The SRW Pin Pounder and Staple Setter have magnetic ends that keep the pin/staples in place making it easy to apply. The Staple Setter is for use with 11 gauge, 1″ steel staples of any length. The Pin Pounder is for round top pins.

Pin Pounder

PART #	LENGTH	QUANTITY
FCMST 6-RT POUND	39″	1/BOX

Staple Setter

PART #	LENGTH	QUANTITY
FCMST 46 SETTER	42″	1/BOX



Pin Pounder



Staple Setter



Wide Sealer Display
(optional Extension Kit shown)



Narrow Sealer Display



Fabric Display



Diamond Blade Display



Adhesive Display

Retail Displays

We make selling our products simple by providing a variety of marketing materials and retail displays. These high quality displays will showcase your SRW Products with style and ease.

Sealer Displays

Wide Sealer Display

PART #	DIMENSIONS	WEIGHT
A MSHELF	72″h x 42″w x 24″d	130 lbs

Narrow Sealer Display

PART #	DIMENSIONS	WEIGHT
B MSIDE	72″h x 28″w x 24″d	73 lbs

Extension Kit for Sealer Display

PART #	DIMENSIONS	WEIGHT
C MEXTENSION	12″h extension	7 lbs

CALL TO ORDER!
Increase sales with these retail displays.
Call your Territory Manager to order today.

Fabric Display

Fabric Display

PART #	DIMENSIONS	WEIGHT
MMETAL RACK	72″h x 28¼″w x 27″d	45 lbs D

Diamond Blade Display

Diamond Blade Displays

PART #	DIMENSIONS	WEIGHT
B DVFLDISPLAY	72″h x 36″w x 24″d	52 lbs E

Adhesive Display

Adhesive Display

PART #	DIMENSIONS	WEIGHT
ADISPLAY	66½″h x 16¾″w x 16″d	40 lbs F

Point-of-Purchase Materials

In the hardscape industry, product information and instructions are vitally important. SRW Products offers a variety of preprinted materials to help you communicate with your customers. Increase sales by keeping your retail displays stocked with Decide Guides, Tech Sheets and product samples. Call today to order 1-800-752-9326.

Materials Available

- Catalogs and Brochures
- Product Samples
- Signage
- Plus Many More



ES
¿ESPAÑOL?
Visite
bit.ly/SRWespanol

Spanish Resources

To ensure you have access to the information you need to get the absolute best performance from each of our products, we have made critical product information available in Spanish. This resource provides a comprehensive list of SRW products with valuable tips and information for Spanish language preferred customers. You will see this symbol *(shown left)* on every product which indicates that you or your customers can visit this webpage for the latest information available: www.SRWproducts.com/espanol

SRW Application & Cross-Reference Charts

Specialty Seal™ Application Chart

Pages 24-26

	Surface Material									SRW Sealer Benefits					
	Retaining Wall Block	Concrete Pavers	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Manufactured Stone	Fieldstone/ Boulders	Wetcast	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Stain Resistance	Commercial Grade
DG DUAL GUARD	x	x	x	x	x		x	x	x		x	x	x		x
RWX RETAINING WALL X-TREME	x						x			x		x			x
CG COUNTER GUARD	x	x	x	x	x	x	x	x	x	x		x		x	x

Premium Stone Seal™ Application Chart

Pages 27-29

	Surface Material					SRW Sealer Benefits				
	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Manufactured Stone	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Commercial Grade
S-PS PENETRATING	x	x	x	x	x	x		x		
S-PSX PENETRATING X-TREME	x	x	x	x	x	x		x		x
S-HGX HIGH GLOSS X-TREME	x	x	x		x		x	x	x	x

Paver Seal™ Application Chart

Pages 30-33

	Surface Material			SRW Sealer Benefits					
	Concrete Pavers	Clay Pavers	Concrete Permeable Pavers	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	Stabilizes Joint Sand	UV Resistance	Commercial Grade
PS PENETRATING	x	x	x	x		x			
PSX PENETRATING X-TREME	x	x	x	x		x			x
LG LOW GLOSS	x				x	x	x	x	
LGX LOW GLOSS X-TREME	x				x	x		x	x
HG HIGH GLOSS	x				x	x	x	x	
HGX HIGH GLOSS X-TREME	x				x	x		x	x

Wetcast Seal™ Application Chart

Pages 34-35

	Surface Material		SRW Sealer Benefits				
	Wetcast	Manufactured Stone	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	UV Resistance	Commercial Grade
W-PSX PENETRATING X-TREME	x	x	x		x		x
W-HGX HIGH GLOSS X-TREME	x	x		x	x	x	x

"SRW has provided us with the best technical support in the industry along with a sealer line that can tackle any application with the highest quality."

—John, Techo Depot

"I have found your product manager and his knowledge to be of GREAT value. Your products are the best of class."

—RJ, The Paver Doctor

"SRW Adhesive is the only adhesive we sell for retaining wall installations, and it is preferred by all of our hardscape installers."

—Ray, Genest Concrete

Concrete Seal™ APPLICATION CHART

PAGES 36-39

	Surface Material					SRW Sealer Benefits				
	Stamped Concrete	Exposed Aggregate	Stained Concrete	Green Concrete	Smooth/Broom Finished	Penetrating	Film-Forming/ Enhancing	Reduce Salt & Freeze/Thaw Damage	Easy Maintenance	UV Resistance
1-STEP *Solvent Based*	X	X	X	X	X	X	X	X	X	X
X-TREME *Solvent Based*	X	X	X	X	X		X	X	X	X
X-TREME *Water Based*	X		X	X	X		X	X	X	X
SELECT *Solvent Based*	X	X	X	X	X		X	X	X	X
SELECT *Water Based*	X		X	X	X		X	X	X	X
GREEN *Solvent Based*				X	X		X	X	X	X
GREEN *Water Based*				X	X		X	X	X	X
TRUE SEAL *Solvent Based*	X	X			X	X		X	X	
TRUE SEAL *Water Based*	X	X			X	X		X	X	
FINISHING *Solvent Based*	X	X	X		X	X		X	X	

Specialty Clean™ APPLICATION CHART

PAGES 14-17

	Natural Stone					Pavers		Wetcast	
	Granite/Quartz	Limestone	Marble/ Travertine	Bluestone/ Sandstone	Fieldstone/ Boulders	Concrete Pavers/Block	Clay Pavers	Wetcast	Manufactured Stone
EF EFFLORESCENCE						X	X		
MC MOLD, MOSS & MILDEW	X	X	X	X	X	X	X	X	X
CD CLEANER & DEGREASER	X	X		X	X	X	X	X	
RE RUST ELIMINATOR				X		X	X		
OC ORGANIC STAIN CLEANER	X	X	X	X	X	X	X	X	X
TR TAR & GUM REMOVER	X	X	X	X	X	X	X	X	
SS SEALER STRIPPER	X	X	X	X	X	X	X	X	
XY XYLENE SOLVENT	X	X	X		X	X		X	X

General Purpose Cleaners APPLICATION CHART

PAGES 18-19

	Surface Material							
	Concrete Retaining Wall	Concrete Pavers	Clay Pavers	Wetcast	Granite	Limestone	Marble/ Travertine	Bluestone/ Sandstone
PW PAVER WASH	X	X	X					
WW WETCAST WASH				X				
SW STONE WASH					X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations.

"Thanks so much for your help and immediate response...something that is so rare these days. I greatly appreciate it."

—Cindy, Homeowner

"SRW Adhesive has been the most consistent product we've sold over the last 10 years. The transition from other lines we were carrying was effortless."

—Russ, Techo Depot

"SRW PAVERMATE comes in great color options, I especially like the granite grey that blends well with most pavers. Also, the fine sand fits in the tightest of paver joints."

—Matt, Superior Lawncare & Construction Inc.

GEOTEXTILE SPECIFICATIONS			NON-WOVEN FABRICS				WOVEN FABRICS	
PROPERTIES	**TEST**	**UNITS**	**NW4**	**NW4.5**	**NW6**	**EC8**	**SS5**	**SS6**
Weight *(typical)*	D5261	oz/sq yd	4	4.5	6	8	4	6
Grab Tensile Strength	D4632	lbs	100	120	160	205	200	315
Grab Elongation	D4632	%	50	50	50	50	15	15
Trap-Tear Strength	D4533	lbs	45	50	60	80	75	120
CBR Puncture	D6241	lbs	270	310	410	525	700	900
Water Flow Rate	D4491	gpm/ft²	140	120	110	90	5	4
Permittivity	D4491	1/sec	2	1.8	1.6	1.4	.05	.05
UV Resistance *(500 hr)*	D4355	%	70	70	70	70	70	70
Apparent Opening Size	D4751	US Sieve	70	70	70	80	50	40

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

LANDSCAPE FABRIC CROSS REFERENCE CHART

SRW	DEWITT	FABRISCAPE	HANES	DALEN - GARDENEER
Residential (6 yr)	6 yr Weed Barrier	—	—	Weed Control
Contractor (10 yr)	—	—	Weed Barrier (Pro Ion)	Weed-Shield 5 yr
Professional (15 yr)	12 yr Weed Barrier	—	Weed Barrier (Pro Ion Plus)	Weed-Shield PLUS 10 yr
SB2 (10 yr)	Typar Premium/Contractor's Select	Commercial Weed Stopper	Pro Steel	Pro-Shield Spun 2
SB3 (20 yr)	Typar Professional/Contractor's Select Plus	Professional Spunbond	Pro Steel Plus	Pro-Shield Spun 3
GC3	Sunbelt	Woven Ground Cover	Ground Cover (Pro Gold)	Pro-Shield Woven 3
LS3	Filter Fabric	Professional Non-Woven	Filter Fabric	—
Pro Plus IV	20 yr Weed Barrier	Woven Weed Restrictor	Pro Platinum	20-yr Weed-Shield Premium
Pro Plus V	Pro 5	Woven Weed Restrictor Plus	Pro Platinum Plus	Professional Weed-X

CONSTRUCTION FABRIC CROSS REFERENCE CHART

SRW	MIRAFI	WILLACOOCHE	PROPEX	US FABRICS	CARTHAGE	TNS	LINQ	CONTECH	SKAPS
NW4	140NC	400N	Geotex 451	US 115NW	FX 40HS	R040	130EX	C40NW	GRT 140
NW4.5	140N	450N	Geotex 401	US 120NW	FX 45HS	R042	140EX	C45NW	GT 142
NW6	160N	600N	Geotex 601	US 160NW	FX 60HS	R060	150EX	C60NW	GT 160
NW7	170N	700N	Geotex 701	US 180NW	FX 70HS	RO70	160EX	C70NW	GT 170
EC8	180N	800N	Geotex 801	US 205NW	FX 80HS	R080	180EX	C80NW	GT 180
NW10	1100N	1000N	Geotex 1001	US 270NW	FX 100HS	R100	250EX	C100NW	GT 110
NW12	1120N	1200N	Geotex 1201	US 300NW	FX 120HS	R120	275EX	C120NW	GT 112
NW16	1160N	1600N	Geotex 1601	US 380NW	FX 160HS	R160	350EX	C160NW	GT 116
SS5	500X	200W	200 ST	US 200	FX 55	W200	GTF 200	C200	SW 200
SS6	600X	315W	315 ST	US 315	FX 66	W315	GTF 300	C300	SW 315

HIGH PERFORMANCE FABRIC CROSS REFERENCE CHART

SRW	MIRAFI	WILLACOOCHEE	PROPEX	US FABRICS	CARTHAGE	SKAPS	THRACE/LINQ
SRW 270HP	HP270	WINFAB 270HP	2x2HF	US 2600	—	—	—
SRW 370HP	HP370	WINFAB 370HP	3x3HF	US 3600	FX 300MF	—	GTF 370
SRW 4x4	HP565	WINFAB 4x4	4x4	US 4800	FX 400MF	—	GTF 500
SRW 570HP	HP570	WINFAB 570HP	4x4HF	US 4800	FX 400MF	—	GTF 570
SRW 770HP	HP770	WINFAB 770HP	4x6	US 7200	—	—	—
SRW MM300	FW300	WINFAB 2300	—	US 830	—	—	—
SRW MM402	FW402	WINFAB 2197	111F	US 1540	Carthage 15%	GTF 400 EO	GTF 400 EO
SRW MM403	FW403	WINFAB 2403	—	US 840	—	—	—
SRW MM404	FW404	WINFAB 2404	—	US 230	FX-230M	—	GTF 404
SRW MM700	FW700	WINFAB 2199	104F	US670	Carthage 6%	M706	GTF 400 E
Permeable 350	—	—	—	—	—	—	—

PAVEMENT FABRIC CROSS REFERENCE CHART

SRW	MIRAFI	WILLACOOCHEE	PROPEX	US FABRICS	CARTHAGE	SKAPS	THRACE/LINQ
CO39	Mirapave 400	300NP	4599	US 90P	FX-38 A/O	GC 130	130EX

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.

GEOGRID: CROSS REFERENCE CHART

SRW		MIRAFI		SYNTEEN		STRATA		TENSAR		CARTHAGE		VERSA-LOK		GEOSTAR	
Series	LTDS	Miragrid®	LTDS	SF	LTDS	Stratagrid®	LTDS	MSE/HS	LTDS	GX®	LTDS	VersaGrid	LTDS	GeoGrid	LTDS
Universal	688	—	—	—	—	—	—	—	—	—	—	—	—	MG100	701
3 Series	1161	2XT	1142	SF20	1161	SG150	861	—	—	GX-200	1128	—	—	—	—
5 Series	2064	3XT	1999	SF35	2064	SG200	1919	UX1100/1400	1450/1760	GX-350	1990	VG3	2064	HP200	1884
7 Series	2867	5XT	2684	SF55	2867	SG350	2666	UX1500	2860	GX-500	2670	VG5	2867	HP300	2597
8 Series	3555	7XT	3370	SF65	3555	SG500	3412	UX1600	3620	GX-600	3353	—	—	—	—
9 Series	4329	8XT	3927	SF80	4329	SG550	4346	UX1700	4390	GX-800	3922	VG8	4329	HP500	4442
10 Series	5160	10XT	5042	SF90	5160	SG600	4852	UX1800	5080	GX-1000	5015	—	—	—	—

SRW Roadbase Geogrid are also available. Call for quote and individual specs.

These cross-reference tables are for comparison only. This information has been obtained from the manufacturers' literature or website. It is the users' responsibility to verify that this is the most current information. All final geogrid/construction comparisons should be determined by a licensed design engineer.

GEOGRID SPECIFICATIONS

PROPERTIES	Units	3 Series	5 Series	7 Series	8 Series	9 Series	10 Series
Long Term Design Strength	lb/ft, MD	1161	2064	2867	3555	4329	5160
Aperture Size (avg)	MD x CMD	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"	.75" x .75"
Design Strength Properties	RFCR/RFID /RFD	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.05 /1.10	1.51/1.1 /1.05
Wide Width Tensile Strength	% Ultimate, MD	2025	3600	5000	6200	7550	9000
Roll Widths	ft	4, 6, 12	6, 12	6, 12	12	12	12
Comparitive Products	—	Mirafi 2XT Strata SG150	Mirafi 3XT Strata SG200	Mirafi 5XT Strata SG350	Mirafi 7XT	Mirafi 8XT Strata SG550	—

Specifications current at the time of printing. Call SRW Products 800-752-9326 for inquiries.

ROAD BASE GRID SPECIFICATIONS

PROPERTIES	Units	RB11	RB12
Ultimate Strength	MD XMD	2388 3870	2388 5268
Initial Modulus	MD XMD	178,000 172,900	178,000 235,000
Load at 2% Strain	MD XMD	526 578	526 797
2% Secant Moduli	MD XMD	26,300 28,900	26,300 39,850
Aperture Size (avg)	MD x CMD	1" x 1"	1" x 1"
Roll Widths	ft	12	12
Comparitive Products	—	Mirafi BasX-11	Mirafi BasX-12

SRW PRODUCTS

Diamond Blades

APPLICATION CHART

PAGES 61-65

	Stone	Pavers		Wetcast		Concrete							Other	
Blade Type	Natural Stone	Concrete Pavers	Clay Pavers/Brick	Wetcast	Manufactured Stone	Retaining Wall/ Concrete Block	High PSI Concrete (5000 or higher)	Rebar Reinforced Concrete	Wire Mesh Reinforced Concrete	Green Concrete (12 hrs. or less)	Green Concrete (20 hrs. or more)	Cured Concrete	Asphalt	Porcelain
GENERAL PURPOSE	X	X	X	X	X	X			X		X	X		
HARD MATERIAL	X	X	X	X			X	X	X			X		X
ALL PURPOSE	X	X	X	X	X	X		X	X		X	X	X	
ABRASIVE MATERIAL										X			X	

SRW PRODUCTS

Concrete Fibers

APPLICATION CHART

PAGES 66-68

	Application									Benefits				Type	
Reinforcement Fiber	Slab on Grade/ Sidewalks/Driveways	Stamped Concrete/ Colored/Decorative	Stucco	Blast Panels/ Mining/Petro-Chem	Pool Decks	Precast	Architectural Precast	Exposed Aggregate	Shotcrete	WWM Replacement	WWF Replacement	Plastic Shrinkage	Temperature Shrinkage	Micro	Macro
M-Macro	X			X	X	X			X	X					X
F-Macro	X			X	X	X			X	X					X
ACR1	X	X	X		X	X	X	X	X		X	X	X	X	
Fibrillated	X				X	X			X		X	X	X	X	
ACR1/2	X	X	X		X	X	X	X	X			X		X	
Monofilament	X	X	X		X	X		X	X			X		X	

NEW SRW PRODUCTS

PAVERMATE Z3

ZERO HAZE

ZERO DUST

ZERO PROBLEMS

solid solutions to BETTER hardscapes

www.SRWproducts.com | 800-752-9326